arXiv:1109.0847v2 [cs.IT] 22 Sep 2011

Robust Transceiver with Tomlinson-Harashima Precoding for Amplify-and-Forward MIMO Relaying Systems

Chengwen Xing, Minghua Xia, Feifei Gao and Yik-Chung Wu

Abstract

In this paper, robust transceiver design with Tomlinson-Harashima precoding (THP) for multi-hop amplify-and-forward (AF) multiple-input multiple-output (MIMO) relaying systems is investigated. At source node, THP is adopted to mitigate the spatial intersymbol interference. However, due to its nonlinear nature, THP is very sensitive to channel estimation errors. In order to reduce the effects of channel estimation errors, a joint Bayesian robust design of THP at source, linear forwarding matrices at relays and linear equalizer at destination is proposed. With novel applications of elegant characteristics of multiplicative convexity and matrix-monotone functions, the optimal structure of the nonlinear transceiver is first derived. Based on the derived structure, the transceiver design problem reduces to a much simpler one with only scalar variables which can be efficiently solved. Finally, the performance advantage of the proposed robust design over non-robust design is demonstrated by simulation results.

Keywords: Amplify-and-forward (AF), multiple-input multiple-output (MIMO), Tomlinson-Harashima precoding, Robust design.

Chengwen Xing is with the School of Information and Electronics, Beijing Institute of Technology, Beijing, China. Phone : (86)1068911841, Fax : (86)1068912615, Email : xingchengwen@gmail.com. *The corresponding author is Chengwen Xing.

Minghua Xia is with the Division of Physical Sciences and Engineering, King Abdullah University of Science and Technology, Thuwal, Saudi Arabia. Email: minghua.xia@kaust.edu.sa.

Feifei Gao is with the Department of Automation, Tsinghua University, Beijing, China. Email: feifeigao@ieee.org.

Yik-Chung Wu is with the Department of Electrical and Electronic Engineering, The University of Hong Kong, Hong Kong. Email : ycwu@eee.hku.hk.

I. INTRODUCTION

Transceiver design for amplify-and-forward (AF) multiple-input multiple-output (MIMO) relaying systems attracted a lot of attention recently, as it has a great potential to enhance the communication range of a simple point-to-point system, while providing spatial diversity and multiplexing gains. This system has been considered to be adopted in the emerging wireless systems, such as LTE-advanced, WINNER project, etc. Linear transceiver design for dual-hop AF MIMO relaying systems has been extensively studied in [1]–[6]. In particular, joint design of relay forwarding matrix and destination equalizer minimizing mean-square-error (MSE) of data streams is discussed in [3]. Joint design of source precoder, relay forwarding matrix and destination equalizer minimizing MSE is investigated in [4]–[6]. The capacity maximization transceiver design has also been reported in [1], [2], [6]. On the other hand, linear transceiver design for multi-hop AF MIMO relaying systems with prefect channel state information (CSI) is discussed in [7]. Furthermore, robust design, which takes channel estimation errors into account, is recently investigated in [8], [9], where the channel estimation uncertainty is considered as nuisance parameters and removed in Bayesian sense.

For multiple-antenna systems, it is well-known that nonlinear transceivers have much better performance than their linear counterparts [10], [11]. Recently, nonlinear transceiver design for AF MIMO relaying systems assuming perfect CSI appears in [12]. There are two kinds of nonlinear transceiver design: decision-feedback equalization (DFE) based design and Tomlinson-Harashima precoding (THP) based design. In fact, there exits a duality between these two designs [12]. However, as THP is performed at transmitter, it is free of error propagation compared to DFE based one. THP is the transmitter counterpart of the vertical BELL-Labs Layered Space-Time (V-BLAST) system. THP can effectively mitigate intersymbol interference or multi-user interference, and is also widely used as one-dimensional dirty paper coding (DPC). Due to its nonlinear nature, unfortunately, THP is more sensitive to channel estimation errors than its linear counterpart. In the presence of channel estimation errors, the performance of THP would degrade severely [13]. Therefore, robust nonlinear transceiver design is a promising way to mitigate such problem. This is the motivation of the current work.

In this paper, we consider a general multi-hop AF MIMO relaying system. The THP at the source, linear forwarding matrices at multiple relays and linear destination equalizer matrix are jointly optimized under channel estimation errors at all terminals. As many design objectives of THP can be considered as a multiplicatively Schur-convex or multiplicatively Schur-concave function, in this work, a unified optimization problem is investigated whose objective functions are multiplicatively Schur-convex/concave. With novel applications of results in multiplicative convexity and matrix-monotone functions, the optimal diagonal structure of the transceiver is derived. With the obtained optimal structures, the transceiver design is then significantly simplified and then iterative water-filling alike solutions are adopted to solve for the remaining unknown variables. It is found that if the objective function is multiplicatively Schur-concave, the proposed nonlinear transceiver design reduces to linear transceiver design. The performance advantage of the proposed robust design is assessed by simulations and is shown to perform much better than the corresponding non-robust design.

The following notations are used throughout this paper. Boldface lowercase letters denote vectors, while boldface uppercase letters denote matrices. The notation $\mathbf{Z}^{\mathrm{H}}$ denotes the Hermitian of the matrix $\mathbf{Z}$, and $\mathrm{Tr}(\mathbf{Z})$ is the trace of the matrix $\mathbf{Z}$. The symbol $\mathbf{I}_M$ denotes an $M \times M$ identity matrix. The notation $\mathbf{Z}^{1/2}$ is the Hermitian square root of the positive semidefinite matrix $\mathbf{Z}$, such that $\mathbf{Z}^{1/2}\mathbf{Z}^{1/2} = \mathbf{Z}$ and $\mathbf{Z}^{1/2}$ is also a Hermitian matrix. The symbol $\mathbb{E}\{\bullet\}$ represents the statistical expectation. For two Hermitian matrices, $\mathbf{C} \succeq \mathbf{D}$ means that $\mathbf{C} - \mathbf{D}$ is a positive semi-definite matrix. The $(n,m)^{\mathrm{th}}$ entry of a matrix $\mathbf{Z}$ is denoted as $[\mathbf{Z}]_{n,m}$ and $\boldsymbol{\lambda}(\mathbf{Z})$ represents the vector consisting of the eigenvalues of $\mathbf{Z}$.

II. SIGNAL MODEL AND PROBLEM FORMULATION

A. Signal Model

In this paper, a K-hop amplify-and-forward MIMO relaying system is investigated, in which there is one source, one destination and $K-1$ relays, as shown in Fig. 1. The source is equipped with N_1 transmit antennas. The k^{th} relay has M_k receive antennas and N_{k+1} transmit antennas. The destination is equipped with M_K receive antennas. At the source, at each time slot, there is a $N \times 1$ vector $\mathbf{a} = [a_1, a_2, \cdots, a_N]^{\mathrm{T}}$ to be transmitted. Specifically, the data symbols are chosen from M-QAM constellation with the real and imaginary parts of a_k belong to the set $\mathcal{A} = \{\pm 1, \pm 3, \cdots, \pm(\sqrt{M}-1)\}$ [1].

As shown by Fig. 1, at the transmitter, the data vector $\mathbf{a}$ is fed into the a precoding unit which consists of a $N \times N$ feedback matrix $\mathbf{B}$ and a nonlinear modulo operator $\mathrm{MOD}_M(\bullet)$. The square matrix $\mathbf{B}$ is a strictly lower triangular matrix which allows data precoding in a recursive fashion and the $\mathrm{MOD}_M(\bullet)$ is defined as

---

[1] In this paper, only square QAM is considered.

$$\mathrm{MOD}_M(x) = x - 2\sqrt{M}\left[\left\lfloor \frac{\mathrm{Re}(x)}{2\sqrt{M}} + \frac{1}{2}\right\rfloor + \sqrt{-1}\left\lfloor \frac{\mathrm{Im}(x)}{2\sqrt{M}} + \frac{1}{2}\right\rfloor\right], \tag{1}$$

where the symbol $\lfloor z \rfloor$ denotes the largest integer not exceeding z. The nonlinear modulo operator reduces the output signals into a square region $[-\sqrt{M}, \sqrt{M}) \times [-\sqrt{M}, \sqrt{M})$.

Generally speaking, nonlinear operation is more complicated to be analyzed than linear operation. To simplify the following analysis, as shown by Fig. 1, the nonlinear precoder can be interpreted as the following linear operation as

$$b_k = a_k - \sum_{l=1}^{k-1} [\mathbf{B}]_{k,l} b_l + d_k \tag{2}$$

where $d_k = 2\sqrt{M} I_k$ and I_k is a complex number whose real and imaginary components are both integer. While we do not need to know the exact value of d_k, it has the effect of reducing b_k into the square region $[-\sqrt{M}, \sqrt{M}) \times [-\sqrt{M}, \sqrt{M})$. The previous equation can be written into a compact form as

$$\mathbf{b} = (\underbrace{\mathbf{B} + \mathbf{I}_N}_{\triangleq \mathbf{C}})^{-1}(\underbrace{\mathbf{a} + \mathbf{d}}_{\triangleq \mathbf{s}}) \tag{3}$$

where $\mathbf{b} \triangleq [b_1, \cdots, b_N]^{\mathrm{T}}$, $\mathbf{d} \triangleq [d_1, \cdots, d_N]^{\mathrm{T}}$, and $\mathbf{C}$ is a lower triangular matrix with unit diagonal elements, i.e., $[\mathbf{C}]_{k,l} = 0$ for $k < l$ and $[\mathbf{C}]_{k,k} = 1$.

After the nonlinear operation, the vector $\mathbf{b}$ is multiplied with a precoder matrix $\mathbf{P}_1$ under a transmit power constraint $\mathrm{Tr}(\mathbf{P}_1 \mathbf{R}_{\mathbf{b}} \mathbf{P}_1^{\mathrm{H}}) \leq P_1$ where P_1 is the maximum transmit power at the source. As the elements of $\mathbf{a}$ are independent and identically distributed (i.i.d.) over the constellation, $\mathbf{b}$ can also be considered as i.i.d. [14], i.e.,

$$\mathbf{R}_{\mathbf{b}} = 2(M-1)/3\mathbf{I}_N \triangleq \sigma_b^2 \mathbf{I}_N. \tag{4}$$

The received signal $\mathbf{x}_1$ at the first relay is formulated as

$$\mathbf{x}_1 = \mathbf{H}_1 \mathbf{P}_1 \mathbf{b} + \mathbf{n}_1 \tag{5}$$

where $\mathbf{H}_1$ is the channel between the source and the first relay and $\mathbf{n}_1$ is additive Gaussian noise with mean zero and covariance matrix $\mathbf{R}_{\mathbf{n}_1} = \sigma_{n_1}^2 \mathbf{I}_{M_1}$.

At the first relay, the received signal $\mathbf{x}_1$ is multiplied by a forwarding matrix $\mathbf{P}_2$ and then the resultant signal is transmitted to the second relay. The received signal at the second relay can be written as

$$\mathbf{x}_2 = \mathbf{H}_2\mathbf{P}_2\mathbf{H}_1\mathbf{P}_1\mathbf{b} + \mathbf{H}_2\mathbf{P}_2\mathbf{n}_1 + \mathbf{n}_2 \tag{6}$$

where $\mathbf{H}_2$ is the MIMO channel matrix between the first and second relay, and $\mathbf{n}_2$ is the additive Gaussian noise vector at the second hop with zero mean and covariance matrix $\mathbf{R}_{\mathbf{n}_2} = \sigma_2^2\mathbf{I}_{M_2}$. Similarly, at the k^{th} relay the received signal is

$$\mathbf{x}_k = \mathbf{H}_k\mathbf{P}_k\mathbf{x}_{k-1} + \mathbf{n}_k \tag{7}$$

with $\mathbf{H}_k$ and $\mathbf{n}_k$ are the channel and additive noise at the k^{th} hop, respectively. The covariance matrix of $\mathbf{n}_k$ is denoted as $\mathbf{R}_{\mathbf{n}_k} = \sigma_k^2\mathbf{I}_{M_k}$. Finally, for a K-hop AF MIMO relaying system, the received signal at the destination is

$$\mathbf{y} = \left[\prod_{k=1}^{K}\mathbf{H}_k\mathbf{P}_k\right]\mathbf{b} + \sum_{k=1}^{K-1}\left\{\left[\prod_{l=k+1}^{K}\mathbf{H}_l\mathbf{P}_l\right]\mathbf{n}_k\right\} + \mathbf{n}_K, \tag{8}$$

where $\prod_{k=1}^{K}\mathbf{Z}_k$ denotes $\mathbf{Z}_K \times \cdots \times \mathbf{Z}_1$. In order to guarantee the transmitted data $\mathbf{s}$ can be recovered at the destination, it is assumed that N_k and M_k are greater than or equal to N [3].

In practice, the channels $\mathbf{H}_k$ are estimated and channel estimation errors are inevitable. Therefore, the channel $\mathbf{H}_k$ can be expressed as

$$\mathbf{H}_k = \bar{\mathbf{H}}_k + \Delta\mathbf{H}_k, \tag{9}$$

where $\bar{\mathbf{H}}_k$ is the estimated channels, and $\Delta\mathbf{H}_k$ is the corresponding channel estimation errors whose elements are zero mean Gaussian random variables. Furthermore, the $M_k \times N_k$ matrix $\Delta\mathbf{H}_k$ can be decomposed using the widely used Kronecker model [8], [9], [15] as $\Delta\mathbf{H}_k = \mathbf{\Sigma}_k^{1/2}\mathbf{H}_{W,k}\mathbf{\Psi}_k^{1/2}$, where the elements of the $M_k \times N_k$ matrix $\mathbf{H}_{W,k}$ are i.i.d. Gaussian random variables with zero mean and unit variance. The specific formulas of $\mathbf{\Sigma}_k$ and $\mathbf{\Psi}_k$ are determined by the training sequences and channel estimators [9], [16].

B. *Problem Formulation*

As shown by Fig. 1, at the destination, a linear equalizer $\mathbf{G}$ is adopted and is followed by a modulo operator. Notice that the effect of $\mathbf{d}$ will be perfectly removed by modulo operator at the destination and estimating $\mathbf{a}$ is equivalent to estimating $\mathbf{s}$ [11]. Thus at the destination, a linear equalizer $\mathbf{G}$ is used to detect the data vector $\mathbf{s}$. The MSE matrix of the data vector is defined as $\mathbb{E}\{(\mathbf{G}\mathbf{y}-\mathbf{s})(\mathbf{G}\mathbf{y}-\mathbf{s})^{\mathrm{H}}\}$ [11], [14], where the expectation is taken with respect to random data, channel estimation errors, and noise. Following a similar derivation to that in [8], it can be shown that

$$\begin{aligned}\mathbf{\Phi}(\mathbf{G},\mathbf{P}_k,\mathbf{C}) &= \mathbb{E}\{(\mathbf{G}\mathbf{y}-\mathbf{C}\mathbf{b})(\mathbf{G}\mathbf{y}-\mathbf{C}\mathbf{b})^{\mathrm{H}}\} \\ &= \mathbf{G}[\bar{\mathbf{H}}_K\mathbf{P}_K\mathbf{R}_{\mathbf{x}_{K-1}}\mathbf{P}_K^{\mathrm{H}}\bar{\mathbf{H}}_K^{\mathrm{H}} + \mathrm{Tr}(\mathbf{P}_K\mathbf{R}_{\mathbf{x}_{K-1}}\mathbf{P}_K^{\mathrm{H}}\mathbf{\Psi}_K)\mathbf{\Sigma}_K + \mathbf{R}_{n_K}]\mathbf{G}^{\mathrm{H}} \\ &\quad - \sigma_b^2\mathbf{G}\prod_{k=1}^{K}\left(\bar{\mathbf{H}}_k\mathbf{P}_k\right)\mathbf{C}^{\mathrm{H}} - \sigma_b^2\left[\mathbf{G}\prod_{k=1}^{K}\left(\bar{\mathbf{H}}_k\mathbf{P}_k\right)\mathbf{C}^{\mathrm{H}}\right]^{\mathrm{H}} + \sigma_b^2\mathbf{C}\mathbf{C}^{\mathrm{H}}\end{aligned} \tag{10}$$

where matrices $\mathbf{R}_{\mathbf{x}_k}$ is defined as

$$\mathbf{R}_{\mathbf{x}_k} \triangleq \mathbb{E}\{\mathbf{x}_k\mathbf{x}_k^{\mathrm{H}}\} = \bar{\mathbf{H}}_k\mathbf{P}_k\mathbf{R}_{\mathbf{x}_{k-1}}\mathbf{P}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}} + \mathrm{Tr}(\mathbf{P}_k\mathbf{R}_{\mathbf{x}_{k-1}}\mathbf{P}_k^{\mathrm{H}}\mathbf{\Psi}_k)\mathbf{\Sigma}_k + \mathbf{R}_{\mathbf{n}_k}. \tag{11}$$

It is obvious that $\mathbf{R}_{\mathbf{x}_k}$ is the covariance matrix of the received signal at the relay. Notice that $\mathbf{R}_{\mathbf{x}_0} = \mathbf{R}_{\mathbf{b}} = \sigma_b^2\mathbf{I}_N$.

For MIMO transceiver design, a wide range of objective functions can be expressed as a function of the diagonal elements of the MSE matrix. For example, for sum MSE minimization, the objective function is $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}})= \sum_{n=1}^{N}\mathrm{MSE}_n$, where $\mathrm{MSE}_n = [\mathbf{\Phi}(\mathbf{G},\mathbf{P}_k,\mathbf{C})]_{n,n}$. For product MSE minimization, the objective function is $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}}) =\prod_{n=1}^{N}\mathrm{MSE}_n$. Furthermore, worst-case MSE minimization corresponds to minimizing the objective function given as $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}}) = \max_{n=1,2,\cdots,N}\{\mathrm{MSE}_n\}$ [6], [10], [11], [17]. On the other hand, weighted geometric mean MSE minimization corresponds to minimizing the following objective function $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}}) = \prod_{n=1}^{N}\mathrm{MSE}_n^{v_n}$ with $0\leq v_1\cdots\leq v_N$. Therefore, a unified transceiver design optimization problem can be formulated as

$$\begin{aligned}\min_{\mathbf{G},\mathbf{P}_k,\mathbf{C}} \quad & f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}}) \\ \mathrm{s.t.} \quad & \mathrm{MSE}_n = [\mathbf{\Phi}(\mathbf{G},\mathbf{P}_k,\mathbf{C})]_{n,n} \\ & \mathrm{Tr}(\mathbf{P}_k\mathbf{R}_{\mathbf{x}_{k-1}}\mathbf{P}_k^{\mathrm{H}}) \leq P_k, \quad k=1,\cdots,K\end{aligned} \tag{12}$$

where the matrix $\mathbf{C}$ is a lower triangular matrix with unit diagonal elements.

In general, the objective function $f(\bullet)$ possesses two important properties:

(1) $f(\bullet)$ is an increasing real-valued matrix function $\mathbb{C}^N \rightarrow \mathbb{R}$, i.e., for two vectors $\mathbf{u} = [u_1,u_2,\cdots,u_N]^{\mathrm{T}}$ and $\mathbf{v} = [v_1,v_2,\cdots,v_N]^{\mathrm{T}}$, when $u_n\geq v_n$, we have $f(\mathbf{u})\geq f(\mathbf{v})$. This property

is natural in transceiver design. This is because for two designs resulting in $[\mathrm{MSE}_1, \cdots, \mathrm{MSE}_N]^{\mathrm{T}}$ and $[\widetilde{\mathrm{MSE}}_1, \cdots, \widetilde{\mathrm{MSE}}_N]^{\mathrm{T}}$, suppose $\mathrm{MSE}_n < \widetilde{\mathrm{MSE}}_n$ for all n, we will prefer the former design. This fact is reflected in $f(\bullet)$ being an increasing function.

(2) $f(\bullet)$ is multiplicatively Schur-convex or concave, with definitions given below.

Definition 1: For any $\mathbf{z} \in \mathbb{R}^n$, let $z_{[k]}$ denotes the k^{th} largest elements of $\mathbf{z}$ and $z_{(k)}$ denotes the k^{th} smallest elements of $\mathbf{z}$, i.e., $z_{[1]} \geq \cdots \geq z_{[N]}$ and $z_{(1)} \leq \cdots \leq z_{(N)}$. For two vectors $\mathbf{v}, \mathbf{u}$ whose elements are **nonnegative**, $\mathbf{v} \prec_{\times} \mathbf{u}$ is defined as

$$\prod_{i=1}^{k} v_{[i]} \leq \prod_{i=1}^{k} u_{[i]}, \quad k = 1, \cdots, N-1 \ \text{ and } \ \prod_{i=1}^{N} v_{[i]} = \prod_{i=1}^{N} u_{[i]}. \tag{13}$$

Definition 2: A function $\phi(\bullet)$ is multiplicatively Schur-convex if and only if $\mathbf{v} \prec_{\times} \mathbf{u}$ implies $\phi(\mathbf{v}) \leq \phi(\mathbf{u})$. Notice that $\phi(\bullet)$ is multiplicatively Schur-convex if and only if $-\phi(\bullet)$ is multiplicatively Schur-concave.

Notice that **Definition 2** cannot be directly used to prove whether a function is multiplicatively Schur-convex or Schur-concave. In practice, we need the following **Lemma 1**.

Lemma 1: Let $\phi(\bullet)$ be a continuous real-valued function defined on $\mathcal{D} = \{\mathbf{z} : z_1 \geq \cdots \geq z_N \geq 0\}$. Then $\phi(\bullet)$ is multiplicatively Schur-convex if and only if for all $\mathbf{z} \in \mathcal{D}$,

$$\phi(z_1, \cdots, z_{k-1}, z_k/e, z_{k+1} \times e, z_{k+2}, \cdots, z_N)$$

is decreasing in e over the following regions

$$1 \leq e \ \text{and} \ z_k/e \geq z_{k+1} \times e \quad \text{for} \quad k = 1, \cdots, N-1. \tag{14}$$

Proof: See Appendix A. ■

With **Lemma 1** and straightforward computation, it can be proved that the four objective functions mentioned above are multiplicatively Schur-convex or concave. In the following, for notational convenience, multiplicatively Schur-convex/concave is referred to as M-Schur-convex/concave.

Remark: Notice that in [10], [11], there is another way to prove whether a function is M-Schur-convex/concave. However, the method in [10], [11] requires all input variables $z_1, z_2, ..., z_N > 0$. In contrast, **Lemma 1** provides a stronger result and allows elements of $\mathbf{z}$ being zero.

III. OPTIMAL DESIGN OF $\mathbf{G}$ AND $\mathbf{C}$

The linear minimum mean-square-error (LMMSE) equalizer is obtained by setting the differentiation of the trace of (10) with respect to $\mathbf{G}^*$ to be zero, and we have

$$\begin{aligned}\mathbf{G}_{\text{LMMSE}} = \sigma_b^2 \left[\prod_{k=1}^{K} \left(\bar{\mathbf{H}}_k \mathbf{P}_k\right) \mathbf{C}^{\text{H}}\right]^{\text{H}} & [\bar{\mathbf{H}}_K \mathbf{P}_K \mathbf{R}_{\mathbf{x}_{K-1}} \mathbf{P}_K^{\text{H}} \bar{\mathbf{H}}_K^{\text{H}} \\ & + \text{Tr}(\mathbf{P}_K \mathbf{R}_{\mathbf{x}_{K-1}} \mathbf{P}_K^{\text{H}} \mathbf{\Psi}_K) \mathbf{\Sigma}_K + \mathbf{R}_{\mathbf{n}_K}]^{-1}. \end{aligned} \tag{15}$$

In terms of MSE, LMMSE estimator is a dominated estimator in linear estimators [18], i.e.,

$$\mathbf{\Phi}(\mathbf{G}_{\text{LMMSE}}, \mathbf{P}_k, \mathbf{C}) \preceq \mathbf{\Phi}(\mathbf{G}, \mathbf{P}_k, \mathbf{C}) \tag{16}$$

which implies $[\mathbf{\Phi}(\mathbf{G}_{\text{LMMSE}}, \mathbf{P}_k, \mathbf{C})]_{n,n} \leq [\mathbf{\Phi}(\mathbf{G}, \mathbf{P}_k, \mathbf{C})]_{n,n}$. As $f(\bullet)$ is an increasing function, and there is no constraint on $\mathbf{G}$ in (12), the optimal linear equalizer is LMMSE equalizer, i.e., $\mathbf{G}_{\text{opt}} = \mathbf{G}_{\text{LMMSE}}$.

Substituting the optimal equalizer (15) into the MSE formulation (10), the MSE matrix is rewritten as

$$\begin{aligned}\mathbf{\Phi}_{\text{MSE}}(\mathbf{P}_k, \mathbf{C}) = \sigma_b^2 \mathbf{C}\Big(\mathbf{I}_N - \sigma_b^2 \left[\prod_{k=1}^{K} \left(\bar{\mathbf{H}}_k \mathbf{P}_k\right) \mathbf{C}^{\text{H}}\right]^{\text{H}} & [\bar{\mathbf{H}}_K \mathbf{P}_K \mathbf{R}_{\mathbf{x}_{K-1}} \mathbf{P}_K^{\text{H}} \bar{\mathbf{H}}_K^{\text{H}} \\ + \text{Tr}(\mathbf{P}_K \mathbf{R}_{\mathbf{x}_{K-1}} \mathbf{P}_K^{\text{H}} \mathbf{\Psi}_K) \mathbf{\Sigma}_K + \mathbf{R}_{n_K}]^{-1} & \left[\prod_{k=1}^{K} \left(\bar{\mathbf{H}}_k \mathbf{P}_k\right) \mathbf{C}^{\text{H}}\right] \Big) \mathbf{C}^{\text{H}} \end{aligned} \tag{17}$$

based on which the optimization problem (12) becomes

$$\begin{aligned} \min_{\mathbf{P}_k, \mathbf{C}} \quad & f([\text{MSE}_1, \cdots, \text{MSE}_N]^{\text{T}}) \\ \text{s.t.} \quad & \text{MSE}_n = [\mathbf{\Phi}_{\text{MSE}}(\mathbf{P}_k, \mathbf{C})]_{n,n} \\ & \text{Tr}(\mathbf{P}_k \mathbf{R}_{\mathbf{x}_{k-1}} \mathbf{P}_k^{\text{H}}) \leq P_k. \end{aligned} \tag{18}$$

From the definition of $\mathbf{R}_{\mathbf{x_k}}$ in (11), it is noticed that $\mathbf{R}_{\mathbf{x}_k}$ is a function of $\mathbf{P}_l$ with $l \leq k$. In other words, the constraints in (18) are coupled with each other. In order to simplify the analysis, we define the following new variables

$$\mathbf{F}_1 = \mathbf{P}_1 \mathbf{R}_{\mathbf{b}}^{1/2} \mathbf{Q}_0^{\text{H}} \tag{19}$$

$$\text{and} \quad \mathbf{F}_k = \mathbf{P}_k \mathbf{K}_{\mathbf{F}_{k-1}}^{1/2} (\mathbf{K}_{\mathbf{F}_{k-1}}^{-1/2} \bar{\mathbf{H}}_{k-1} \mathbf{F}_{k-1} \mathbf{F}_{k-1}^{\text{H}} \bar{\mathbf{H}}_{k-1}^{\text{H}} \mathbf{K}_{\mathbf{F}_{k-1}}^{-1/2} + \mathbf{I}_{M_{k-1}})^{1/2} \mathbf{Q}_{k-1}^{\text{H}} \tag{20}$$

where $\mathbf{K}_{\mathbf{F}_k}$ is defined as

$$\mathbf{K}_{\mathbf{F}_k} \triangleq \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}\mathbf{\Psi}_k)\mathbf{\Sigma}_k + \sigma_{n_k}^2\mathbf{I}_{M_k}, \tag{21}$$

and the matrix $\mathbf{Q}_k$ is an additional unknown unitary matrix. Based on the definition of $\mathbf{F}_k$ in (19) and (20), it is easy to show that $\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}} = \mathbf{P}_k\mathbf{R}_{\mathbf{x}_{k-1}}\mathbf{P}_k^{\mathrm{H}}$ and thus the power constraints becomes independent of each other

$$\mathrm{Tr}(\mathbf{P}_k\mathbf{R}_{\mathbf{x}_{k-1}}\mathbf{P}_k^{\mathrm{H}}) = \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) \leq P_k. \tag{22}$$

Meanwhile, using (19) and (20), the MSE matrix is further reformulated as

$$\begin{aligned}\mathbf{\Phi}_{\mathrm{MSE}}(\mathbf{Q}_k,\mathbf{F}_k,\mathbf{C}) &= \mathbf{C}\Big(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\{\prod_{k=1}^{K}[\mathbf{Q}_k(\mathbf{K}_{\mathbf{F}_k}^{-1/2}\bar{\mathbf{H}}_k\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1/2} + \mathbf{I}_{M_k})^{-1/2}\mathbf{K}_{\mathbf{F}_k}^{-1/2}\bar{\mathbf{H}}_k\mathbf{F}_k]\}^{\mathrm{H}} \\ &\quad \times \{\prod_{k=1}^{K}[\mathbf{Q}_k\underbrace{(\mathbf{K}_{\mathbf{F}_k}^{-1/2}\bar{\mathbf{H}}_k\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1/2} + \mathbf{I}_{M_k})^{-1/2}\mathbf{K}_{\mathbf{F}_k}^{-1/2}\bar{\mathbf{H}}_k\mathbf{F}_k}_{\triangleq\mathbf{M}_k}]\}\mathbf{Q}_0\Big)\mathbf{C}^{\mathrm{H}}\sigma_b^2 \\ &= \sigma_b^2\mathbf{C}(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\underbrace{\mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}}\mathbf{M}_2^{\mathrm{H}}\mathbf{Q}_2^{\mathrm{H}}\cdots\mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K\cdots\mathbf{Q}_2\mathbf{M}_2\mathbf{Q}_1\mathbf{M}_1}_{\triangleq\mathbf{\Theta}}\mathbf{Q}_0)\mathbf{C}^{\mathrm{H}}.\end{aligned} \tag{23}$$

Based on (22) and (23), the optimization problem (18) is simplified as

$$\begin{aligned} \min_{\mathbf{F}_k,\mathbf{Q}_k,\mathbf{C}} \quad & f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}}) \\ \mathrm{s.t.} \quad & \mathrm{MSE}_n = \sigma_b^2\left[\mathbf{C}(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\mathbf{\Theta}\mathbf{Q}_0)\mathbf{C}^{\mathrm{H}}\right]_{n,n} \\ & \mathbf{\Theta} = \mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}}\cdots\mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K\cdots\mathbf{Q}_1\mathbf{M}_1 \\ & \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) \leq P_k, \quad \mathbf{Q}_k^{\mathrm{H}}\mathbf{Q}_k = \mathbf{I}_{M_{k-1}}. \end{aligned} \tag{24}$$

Notice that the largest singular value of $\mathbf{M}_k$ is smaller than one. Therefore, the largest eigenvalue of $\mathbf{\Theta}$ is smaller than one [19] and then $\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\mathbf{\Theta}\mathbf{Q}_0$ is a positive definite matrix. With the Cholesky factorization

$$(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\mathbf{\Theta}\mathbf{Q}_0)\sigma_b^2 = \mathbf{L}\mathbf{L}^{\mathrm{H}} \tag{25}$$

where $\mathbf{L}$ is a lower triangular matrix, and the definition of MSE_n in the second line of (24), we have

$$\begin{aligned}\mathrm{MSE}_n &= \sigma_b^2[\mathbf{C}(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\boldsymbol{\Theta}\mathbf{Q}_0)\mathbf{C}^{\mathrm{H}}]_{n,n} \\ &= ([\mathbf{C}^{\mathrm{H}}]_{:,n})^{\mathrm{H}}\mathbf{L}\mathbf{L}^{\mathrm{H}}[\mathbf{C}^{\mathrm{H}}]_{:,n} \\ &= \sum_{i=1}^{n-1}[\mathbf{L}]_{i,i}^2|[(\mathbf{C}\mathbf{L}\mathbf{D}^{-1})^{\mathrm{H}}]_{i,n}|^2 + [\mathbf{L}]_{n,n}^2 \\ &\geq [\mathbf{L}]_{n,n}^2, \end{aligned} \tag{26}$$

where $\mathbf{D}$ is a diagonal matrix defined as

$$\mathbf{D} = \mathrm{diag}\{[\mathbf{L}_{1,1}, \cdots, \mathbf{L}_{N,N}]^{\mathrm{T}}\}. \tag{27}$$

In order to make the equality in the final line of (26) to hold, we need $\sum_{i=1}^{n-1}[\mathbf{L}]_{i,i}^2|[(\mathbf{C}\mathbf{L}\mathbf{D}^{-1})^{\mathrm{H}}]_{i,n}|^2 = 0$, whose solution is

$$\mathbf{C}_{\mathrm{opt}} = \mathbf{D}\mathbf{L}^{-1}. \tag{28}$$

As a result $\mathrm{MSE}_n = [\mathbf{L}]_{n,n}^2$, and the optimization problem for robust transceiver design is formulated as

$$\begin{aligned} \min_{\mathbf{F}_k, \mathbf{Q}_k} \quad & f\big(\big[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2\big]^{\mathrm{T}}\big) \\ \mathrm{s.t.} \quad & \sigma_b^2(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\boldsymbol{\Theta}\mathbf{Q}_0) = \mathbf{L}\mathbf{L}^{\mathrm{H}} \\ & \boldsymbol{\Theta} = \mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}}\cdots\mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K\cdots\mathbf{Q}_1\mathbf{M}_1 \\ & \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) \leq P_k, \quad \mathbf{Q}_k^{\mathrm{H}}\mathbf{Q}_k = \mathbf{I}_{M_k}. \end{aligned} \tag{29}$$

IV. OPTIMIZATION PROBLEM REFORMULATION FOR $\mathbf{F}_k$

A. Optimal Solution of $\mathbf{Q}_0$

Because the objective function of the optimization problem (29) is M-Schur-convex or M-Schur-concave. In the following, we will discuss the two cases separately.

M-Schur-convex:

Taking the determinant on both sides of (25), we have

$$|\sigma_b^2(\mathbf{I}_N - \mathbf{Q}_0^{\mathrm{H}}\boldsymbol{\Theta}\mathbf{Q}_0)| = \prod_{n=1}^{N}[\mathbf{L}]_{n,n}^2 = \sigma_b^{2N}\prod_{n=1}^{N}(1 - \lambda_n(\boldsymbol{\Theta})) \tag{30}$$

where $\lambda_n(\boldsymbol{\Theta})$ is the n^{th} largest eigenvalue of $\boldsymbol{\Theta}$. Based on (30), the following multiplicative majorization relationship can be established [19]

$$\sigma_b^2 \left[\prod_{n=1}^{N}(1-\lambda_n(\boldsymbol{\Theta}))\right]^{\frac{1}{N}} \otimes \mathbf{1}_N \prec_{\times} \left[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2\right]^{\mathrm{T}}, \tag{31}$$

where the symbol $\otimes$ denotes the Kronecker product and $\mathbf{1}_N$ is a $N \times 1$ all-one vector. With **Definition 2** and $f(\bullet)$ being a M-Schur-convex function, (31) leads to

$$f(\left[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2\right]^{\mathrm{T}}) \geq \underbrace{f\left(\sigma_b^2 \left[\prod_{n=1}^{N}(1-\lambda_n(\boldsymbol{\Theta}))\right]^{\frac{1}{N}} \otimes \mathbf{1}_N\right)}_{\triangleq g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]}, \tag{32}$$

where $\boldsymbol{\lambda}(\boldsymbol{\Theta}) = [\lambda_1(\boldsymbol{\Theta}), \cdots, \lambda_N(\boldsymbol{\Theta})]^{\mathrm{T}}$. The equality in (32) holds when $\prec_{\times}$ in (31) is replaced by equality, which means that $[\mathbf{L}]_{n,n}^2$ are identical for all n. Notice that from (25), we can write $\mathbf{L}\mathbf{L}^{\mathrm{H}} = \sigma_b^2 \mathbf{Q}_0^{\mathrm{H}}(\mathbf{I}-\boldsymbol{\Theta})\mathbf{Q}_0$. Since $\mathbf{I}-\boldsymbol{\Theta}$ is positive definite, there always exists an unitary matrix $\mathbf{Q}_0$ which makes the Chrolesky factorization matrix of $\mathbf{Q}_0^{\mathrm{H}}(\mathbf{I}-\boldsymbol{\Theta})\mathbf{Q}_0$ have identical diagonal elements [11]. An explicit algorithm for constructing such $\mathbf{Q}_0$ is given in Appendix B.

M-Schur-concave:

From definition of $\mathbf{L}$ in (25) and based Weyl' theorem [20], we have

$$\left[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2\right]^{\mathrm{T}} \prec_{\times} \sigma_b^2[\mathbf{1}_N - \boldsymbol{\lambda}(\boldsymbol{\Theta})]. \tag{33}$$

Applying $f(\bullet)$ on both sides of (33) and with **Definition 2**, we have

$$f(\left[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2\right]^{\mathrm{T}}) \geq \underbrace{f(\sigma_b^2[\mathbf{1}_N - \boldsymbol{\lambda}(\boldsymbol{\Theta})])}_{\triangleq g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]}. \tag{34}$$

The equality in (34) holds when $\prec_{\times}$ in (33) is replaced by equality, which means that $[\mathbf{L}]_{n,n}^2$ equals to $\sigma_b^2[1-\lambda_n(\boldsymbol{\Theta})]$. On the other hand, taking eigenvalues on both sides of (25), we can obtain $\sigma_b^2[\mathbf{1}_N - \boldsymbol{\lambda}(\boldsymbol{\Theta})] = [\lambda_N(\mathbf{L}\mathbf{L}^{\mathrm{H}}), \cdots, \lambda_1(\mathbf{L}\mathbf{L}^{\mathrm{H}})]^{\mathrm{T}}$. Therefore, $[[\mathbf{L}]_{1,1}^2, \cdots, [\mathbf{L}]_{N,N}^2]^{\mathrm{T}} = [\lambda_N(\mathbf{L}\mathbf{L}^{\mathrm{H}}), \cdots, \lambda_1(\mathbf{L}\mathbf{L}^{\mathrm{H}})]^{\mathrm{T}}$, which implies L is a diagonal matrix. With $\mathbf{L}$ being a diagonal matrix, $\mathbf{Q}_0^{\mathrm{H}}\boldsymbol{\Theta}\mathbf{Q}_0$ is also a diagonal matrix. This can be satisfied if we take $\mathbf{Q}_0 = \mathbf{U}_{\boldsymbol{\Theta}}$, where the unitary matrix $\mathbf{U}_{\boldsymbol{\Theta}}$ is defined based on the eigendecomposition $\boldsymbol{\Theta} = \mathbf{U}_{\boldsymbol{\Theta}}\boldsymbol{\Lambda}_{\boldsymbol{\Theta}}\mathbf{U}_{\boldsymbol{\Theta}}^{\mathrm{H}}$ with the elements of $\boldsymbol{\Lambda}_{\boldsymbol{\Theta}}$ arranged in decreasing order.

Notice that since $\mathbf{L}$ is a diagonal matrix, $\mathbf{C}_{\mathrm{opt}}$ in (28) is also a diagonal matrix. Based on the definition of $\mathbf{C}$ in (3) and with the fact that $\mathbf{C}$ is a lower triangular matrix with unit diagonal elements, it can be seen that the feedback matrix $\mathbf{B}$ must be an all-zero matrix. Therefore, when the objective function is M-Schur-concave, THP becomes linear precoding.

Summary:

Summarizing the previous results, when the objective function is M-Schur-convex or M-Schur-concave, the optimization problem (29) is equivalent to

$$\begin{aligned} \min_{\mathbf{F}_k, \mathbf{Q}_k} \quad & g[\boldsymbol{\lambda}(\boldsymbol{\Theta})] \\ \text{s.t.} \quad & \boldsymbol{\Theta} = \mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}} \cdots \mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K \cdots \mathbf{Q}_1\mathbf{M}_1 \\ & \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) \leq P_k, \quad \mathbf{Q}_k^{\mathrm{H}}\mathbf{Q}_k = \mathbf{I}_{M_k}. \end{aligned} \tag{35}$$

where $g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]$ equals to

$$g[\boldsymbol{\lambda}(\boldsymbol{\Theta})] = \begin{cases} f(\sigma_b^2[\prod_{n=1}^{N}(1-\lambda_n(\boldsymbol{\Theta}))]^{\frac{1}{N}} \otimes \mathbf{1}_N) & \text{if } f(\bullet) \text{ is M-Schur-convex} \\ f(\sigma_b^2[\mathbf{1}_N - \boldsymbol{\lambda}(\boldsymbol{\Theta})]) & \text{if } f(\bullet) \text{ is M-Schur-concave} \end{cases}. \tag{36}$$

It is difficult to directly solve the optimization problem (35), because $\boldsymbol{\Theta}$ is a product consists of matrices $\mathbf{M}_k$'s which in turn are complicated functions of the variables $\mathbf{F}_k$'s. In order to simplify the optimization problem (35), multiplicative majorization theory will be exploited, which transforms the objective function of (35) to be a direct function of $\mathbf{F}_k$. Below several useful results are given first, which form the theoretical basis of the following derivation.

B. Prerequisites of Multiplicative Majorization Theory

Definition 3: For two vectors $\mathbf{v}, \mathbf{u} \in \mathcal{D}$ with $\mathcal{D} = \{\mathbf{z} : z_1 \geq \cdots \geq z_N \geq 0\}$, $\mathbf{v} \prec_{\Pi} \mathbf{u}$ is defined as

$$\prod_{i=1}^{k} v_{[i]} \leq \prod_{i=1}^{k} u_{[i]}, \quad k = 1, \cdots, N. \tag{37}$$

Notice that there is a subtle difference between **Definition 2** in (13) and **Definition 3**. In **Definition 3**, when $k = N$, $\prod_{i=1}^{N} v_{[i]} \leq \prod_{i=1}^{N} u_{[i]}$ rather than $\prod_{i=1}^{N} v_{[i]} = \prod_{i=1}^{N} u_{[i]}$ in **Definition 2**.

Lemma 2: Let $\phi(\bullet)$ be a real-valued function on $\mathcal{D}$. Then $\phi(\bullet)$ is decreasing and multiplicatively Schur-concave on $\mathcal{D}$ if and only if

$$\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u}). \tag{38}$$

Proof: See Appendix C. ■

Lemma 3: When $\phi(\bullet)$ is increasing and multiplicatively Schur-concave, for $\mathbf{v},\mathbf{u}\in\mathcal{C}=\{\mathbf{z}: 1>z_1\geq\cdots\geq z_N\geq 0\}$

$$\mathbf{v}\prec_{\Pi}\mathbf{u}\Rightarrow\phi(\mathbf{1}_N-\mathbf{v})\geq\phi(\mathbf{1}_N-\mathbf{u}). \tag{39}$$

Proof: See Appendix D. ■

C. Problem Reformulation

Based on the given results of multiplicative majorization theory, the optimization problem (35) can be transformed into a much simpler one. Before presenting the result, two useful properties of the objective function $g(\bullet)$ are first derived based on the multiplicative majorization theory.

Property 1: The vector $\boldsymbol{\lambda}(\boldsymbol{\Theta})$ has the following relationship

$$\boldsymbol{\lambda}(\boldsymbol{\Theta})\prec_{\Pi}\underbrace{[\gamma_1(\{\mathbf{F}_k\}_{k=1}^K),\gamma_2(\{\mathbf{F}_k\}_{k=1}^K),\cdots,\gamma_N(\{\mathbf{F}_k\}_{k=1}^K)]^{\mathrm{T}}}_{\triangleq\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)}$$

$$\text{with }\gamma_n(\{\mathbf{F}_k\}_{k=1}^K)=\prod_{k=1}^K\frac{\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}{1+\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}, \tag{40}$$

where the equality holds when

$$\mathbf{Q}_k=\mathbf{V}_{\mathbf{M}_{k+1}}\mathbf{U}_{\mathbf{M}_k}^{\mathrm{H}},\quad k=1,\cdots,K-1 \tag{41}$$

where $\mathbf{U}_{\mathbf{M}_k}$ and $\mathbf{V}_{\mathbf{M}_k}$ are defined based on the singular value decomposition $\mathbf{M}_k=\mathbf{U}_{\mathbf{M}_k}\boldsymbol{\Lambda}_{\mathbf{M}_k}\mathbf{V}_{\mathbf{M}_k}^{\mathrm{H}}$ with the diagonal elements of $\boldsymbol{\Lambda}_{\mathbf{M}_k}$ arranged in decreasing order. Notice that (41) does not cover $\mathbf{Q}_K$, but it can be any unitary matrix because it always appears in the form $\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K$ and equals to an identity matrix in the objective function.

Proof: See Appendix E. ■

Property 2: The objective function $g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]$ in (35) is a decreasing M-Schur-concave function with respective to $\boldsymbol{\lambda}(\boldsymbol{\Theta})$.

Proof: Based on **Lemma 2**, it is obvious that $g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]$ is a decreasing M-Schur-concave function if and only if $\boldsymbol{\lambda}(\boldsymbol{\Theta})\prec_{\Pi}\boldsymbol{\lambda}(\tilde{\boldsymbol{\Theta}})\Rightarrow g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]\geq g[\boldsymbol{\lambda}(\tilde{\boldsymbol{\Theta}})]$. In the following, we will prove the latter.

When $f(\bullet)$ is M-Schur-convex, $g[\boldsymbol{\lambda}(\boldsymbol{\Theta})]=f(\sigma_b^2[\prod_{n=1}^N(1-\lambda_n(\boldsymbol{\Theta}))]^{\frac{1}{N}}\otimes\mathbf{1}_N)$. Using **Lemma 1**, $\prod_{n=1}^N(1-\lambda_n(\boldsymbol{\Theta}))$ can be proved to be a M-Schur-concave function of $\boldsymbol{\lambda}(\boldsymbol{\Theta})$. Furthermore, it can be easily seen that $\prod_{n=1}^N(1-\lambda_n(\boldsymbol{\Theta}))$ is a decreasing function. If $\boldsymbol{\lambda}(\boldsymbol{\Theta})\prec_{\Pi}\boldsymbol{\lambda}(\tilde{\boldsymbol{\Theta}})$ is true, based on **Lemma 2**, we have

$$\prod_{n=1}^{N}(1-\lambda_n(\mathbf{\Theta})) \geq \prod_{n=1}^{N}(1-\lambda_n(\tilde{\mathbf{\Theta}})). \tag{42}$$

Together with the fact that $f(\bullet)$ is an increasing function, it is concluded that

$$\underbrace{f(\sigma_b^2[\prod_{n=1}^{N}(1-\lambda_n(\mathbf{\Theta}))]^{1/N}\otimes 1)}_{g[\boldsymbol{\lambda}(\mathbf{\Theta})]} \geq \underbrace{f(\sigma_b^2[\prod_{n=1}^{N}(1-\lambda_n(\tilde{\mathbf{\Theta}}))]^{1/N}\otimes 1)}_{g[\boldsymbol{\lambda}(\tilde{\mathbf{\Theta}})]}. \tag{43}$$

On the other hand, when $f(\bullet)$ is increasing and M-Schur-concave, $g[\boldsymbol{\lambda}(\mathbf{\Theta})] = f(\sigma_b^2[\mathbf{1}_N - \boldsymbol{\lambda}(\mathbf{\Theta})])$. Using **Lemma 3** we directly have $\boldsymbol{\lambda}(\mathbf{\Theta}) \prec_{\Pi} \boldsymbol{\lambda}(\tilde{\mathbf{\Theta}})$ implies

$$\underbrace{f(\sigma_b^2[\mathbf{1}_N-\boldsymbol{\lambda}(\mathbf{\Theta})])}_{g[\boldsymbol{\lambda}(\mathbf{\Theta})]} \geq \underbrace{f(\sigma_b^2[\mathbf{1}_N-\boldsymbol{\lambda}(\tilde{\mathbf{\Theta}})])}_{g[\boldsymbol{\lambda}(\tilde{\mathbf{\Theta}})]}. \tag{44}$$

■

Based on **Properties 1** and **2**, the objective function of (35) has an achievable lower bound $g[\boldsymbol{\lambda}(\mathbf{\Theta})] \geq g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)]$ with equality achieved when (41) is satisfied. When the lower bound is achieved, we have the following three additional observations:

(a) The constraints $\mathbf{Q}_k^{\mathrm{H}}\mathbf{Q}_k = \mathbf{I}_{M_k}$ are automatically satisfied.

(b) The objective function $g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)]$ is independent of $\mathbf{Q}_k$.

(c) When $\mathbf{F}_k$'s are known, $\mathbf{Q}_k$'s can be directly computed using (41).

Applying these three observations into (35), we have the reformulated optimization problem

$$\begin{aligned} \min_{\mathbf{F}_k} \quad & g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)] \\ \text{s.t.} \quad & \gamma_n(\{\mathbf{F}_k\}_{k=1}^K) = \prod_{k=1}^{K}\frac{\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}{1+\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)} \\ & \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) \leq P_k. \end{aligned} \tag{45}$$

V. SOLUTION OF $\mathbf{F}_k$

In the following, we first derive the optimal structure of $\mathbf{F}_k$ and then present an algorithm to solve for the remaining unknown variables.

A. Optimal Structure of $\mathbf{F}_k$

Notice that $g(\bullet)$ is a decreasing function, and $\gamma_n(\{\mathbf{F}_k\}_{k=1}^K)$ is an increasing function of $\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)$. Therefore, $g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)]$ is a decreasing matrix-monotone function of $\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k$ [22]. Following the derivation in [21], it can be proved that at the optimal solution, the power constraints hold at the equality, i.e., $\mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) = P_k$, meaning that the relays transmit at the maximum power.

Defining a variable η_{f_k} as

$$\eta_{f_k} = \alpha_k \mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}\boldsymbol{\Psi}_k) + \sigma_{n_k}^2 \quad \text{with} \quad \alpha_k = \mathrm{Tr}(\boldsymbol{\Sigma}_k)/M_k, \tag{46}$$

$\mathrm{Tr}(\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}) = P_k$ is equivalent to $\mathrm{Tr}[\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I}_{N_k})]/\eta_{f_k} = P_k$ [21], [22]. Thus the robust transceiver design problem (45) is equivalent to

$$\begin{aligned} \min_{\mathbf{F}_k} \quad & g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)] \\ \text{s.t.} \quad & \gamma_n(\{\mathbf{F}_k\}_{k=1}^K) = \prod_{k=1}^K \frac{\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}{1+\lambda_n(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)} \\ & \mathrm{Tr}[\mathbf{F}_k\mathbf{F}_k^{\mathrm{H}}(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I}_{N_k})]/\eta_{f_k} = P_k. \end{aligned} \tag{47}$$

It is proved in Appendix F that when $\boldsymbol{\Psi}_k \propto \mathbf{I}$ or $\boldsymbol{\Sigma}_k \propto \mathbf{I}$, the optimal solutions of the optimization problem (47) have the following structure

$$\begin{aligned} \mathbf{F}_{k,\mathrm{opt}} &= \sqrt{\xi_k(\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k})}(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{-1/2}\mathbf{V}_{\boldsymbol{\mathcal{H}}_k,N}\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}\mathbf{U}_{\mathrm{Arb}_k,N}^{\mathrm{H}} \\ \text{with} \quad \xi_k(\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}) &= \sigma_{n_k}^2/\{1-\alpha_k\mathrm{Tr}[\mathbf{V}_{\boldsymbol{\mathcal{H}}_k,N}^{\mathrm{H}}(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{-1/2} \\ & \qquad \times \boldsymbol{\Psi}_k(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{-1/2}\mathbf{V}_{\boldsymbol{\mathcal{H}}_k,N}\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}^2]\}, \end{aligned} \tag{48}$$

where $\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$ is a $N \times N$ unknown diagonal matrix, and $\mathbf{V}_{\boldsymbol{\mathcal{H}}_k,N}$ and $\mathbf{U}_{\mathrm{Arb}_k,N}$ are the matrices consisting of the first N columns of $\mathbf{V}_{\boldsymbol{\mathcal{H}}_k}$ and $\mathbf{U}_{\mathrm{Arb}_k}$, respectively. The unitary matrix $\mathbf{U}_{\mathrm{Arb}_k}$ is an arbitrary $M_{k-1} \times M_{k-1}$ unitary matrix, and the unitary matrix $\mathbf{V}_{\boldsymbol{\mathcal{H}}_k}$ is defined based on the following singular value decomposition

$$(\mathbf{K}_{\mathbf{F}_k}/\eta_{f_k})^{-1/2}\bar{\mathbf{H}}_k(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{-1/2} = \mathbf{U}_{\boldsymbol{\mathcal{H}}_k}\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{H}}_k}\mathbf{V}_{\boldsymbol{\mathcal{H}}_k}^{\mathrm{H}} \tag{49}$$

where the diagonal elements of $\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{H}}_k}$ are arranged in decreasing order.

B. Computation of $\mathbf{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$

It is obvious that in (48), the only unknown variable is $\mathbf{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$. In the following, we will discuss how to solve $\mathbf{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$ in more detail. Denoting the following diagonal elements as

$$[\mathbf{\Lambda}_{\boldsymbol{\mathcal{H}}_k}]_{n,n} = h_{k,n}, \qquad [\mathbf{\Lambda}_{\boldsymbol{\mathcal{F}}_k}]_{n,n} = f_{k,n} \tag{50}$$

substituting (48) into the optimization problem (47) and making use of (49), after a tedious but straightforward derivation, the optimization for robust transceiver design is simplified as

$$\begin{aligned} \min_{f_{k,n}} \quad & g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)] \\ \text{s.t.} \quad & \gamma_n(\{\mathbf{F}_k\}_{k=1}^K) = \prod_{k=1}^K \frac{f_{k,n}^2 h_{k,n}^2}{f_{k,n}^2 h_{k,n}^2 + 1} \\ & \sum_{n=1}^N f_{k,n}^2 = P_k. \end{aligned} \tag{51}$$

The solution of (51) depends on whether $f(\bullet)$ is M-Schur-convex or M-schur-concave.

1) M-Schur-convex functions: Notice that when $f([\mathrm{MSE}_1, \cdots, \mathrm{MSE}_N]^{\mathrm{T}})$ is an M-Schur-convex function, regardless of the specific expression of $f(\bullet)$, the optimization problem (51) is equivalent to minimize $\prod_{n=1}^N (1 - \gamma_n(\{\mathbf{F}_k\}_{k=1}^K))$ [11]. Therefore, the transceiver design problem (51) equals to

$$\begin{aligned} \min_{f_{k,i}} \quad & \sum_{n=1}^N \log\left(1 - \frac{\prod_{k=1}^K f_{k,n}^2 h_{k,n}^2}{\prod_{k=1}^K (f_{k,n}^2 h_{k,n}^2 + 1)}\right) \\ \text{s.t.} \quad & \sum_{n=1}^N f_{k,n}^2 = P_k. \end{aligned} \tag{52}$$

In order to solve the optimization problem (52), iterative water-filling can be used to solve for $f_{k,i}$ with convergence guaranteed. More specifically, when $f_{l,i}$'s are fixed with $l \neq k$, $f_{k,i}$ is computed as

$$\begin{aligned} & f_{k,n}^2 = \frac{1}{h_{k,n}^2}\left(\frac{-a_{k,n} + \sqrt{a_{k,n}^2 + 4(1-a_{k,n})a_{k,n}h_{k,n}^2/\mu_k}}{2(1-a_{k,n})} - 1\right)^+ \quad n = 1, \cdots, N \\ & \text{with} \quad a_{k,n} = \prod_{l \neq k} f_{l,n}^2 h_{l,n}^2 / (f_{l,n}^2 h_{l,n}^2 + 1) \end{aligned} \tag{53}$$

where μ_k is the Lagrange multiplier which makes $\sum_{n=1}^N f_{k,n}^2 = P_k$ hold [23]. Notice that this iterative water-filling algorithm is guaranteed to converge, as discussed in [24].

2) M-Schur-concave functions: When $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}})$ is a M-Schur-concave functions, there is no unified solution. In this case, $\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$ should be solved case by case. In the following, we use the example $f([\mathrm{MSE}_1,\cdots,\mathrm{MSE}_N]^{\mathrm{T}})=\prod_{n=1}^{N}\mathrm{MSE}_n^{v_n}$ for $0\leq v_1\leq v_2\cdots v_N$ to illustrate how to compute $\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$. For this objective function, using (36) it follows that $g[\boldsymbol{\gamma}(\{\mathbf{F}_k\}_{k=1}^K)]=\sigma_b^{2\sum_i v_i}\prod_{i=1}^{N}\left(1-\gamma_i(\{\mathbf{F}_k\}_{k=1}^K)\right)^{v_i}$ and the optimization (51) is equivalent to

$$\begin{aligned}\min_{f_{k,i}}\quad&\sum_{n=1}^{N}v_n\log\left(1-\frac{\prod_{k=1}^{K}f_{k,n}^2h_{k,n}^2}{\prod_{k=1}^{K}(f_{k,n}^2h_{k,n}^2+1)}\right)\\ \mathrm{s.t.}\quad&\sum_{n=1}^{N}f_{k,n}^2=P_k.\end{aligned}\tag{54}$$

Equation (54) has the same form as (52). Therefore, the solution can also be obtained by iterative water-filling solution. Notice that although the problem becomes linear transceiver design problem when $f(\bullet)$ is M-Schur concave, the current framework provides a generalization of linear transceiver design for multi-hop system.

VI. SIMULATION RESULTS AND DISCUSSIONS

In this section, the performance of the proposed algorithms is assessed by simulations. In the following, we consider an AF MIMO relaying system where the source, relays and destination are all equipped with four antennas, i.e., $N_k=M_k=4$. The estimation error correlation matrices are chosen as the popular exponential model $[\boldsymbol{\Psi}_k]=\sigma_e^2\rho_t^{|i-j|}$ and $[\boldsymbol{\Sigma}_k]=\rho_r^{|i-j|}$ [8] where ρ_t and ρ_r are the correlation coefficients, and σ_e^2 denotes the estimation error variance. The estimated channels $\bar{\mathbf{H}}_k$'s are randomly generated based on the following complex Gaussian distributions [8], [25]

$$\bar{\mathbf{H}}_k\sim\mathcal{CN}_{M_k,N_k}(\mathbf{0}_{M_k,N_k},\frac{(1-\sigma_e^2)}{\sigma_e^2}\boldsymbol{\Sigma}_k\otimes\boldsymbol{\Psi}_k^{\mathrm{T}}),\tag{55}$$

such that channel realizations $\mathbf{H}_k=\bar{\mathbf{H}}_k+\Delta\mathbf{H}_k$ have unit variance. We define the signal-to-noise ratio (SNR) for the k^{th} link as $P_k/\sigma_{n_k}^2$. At the source node, four independent data streams are transmitted and in each data stream, $N_{\mathrm{Data}}=10000$ independent 16-QAM symbols are transmitted. Each point in the following figures is an average of 10000 trials.

First, we compare the performance of transceiver design with M-Schur-convex versus M-Schur-concave objective functions. As discussed before, M-Schur-concave objective function corresponds to linear transceiver design. Therefore, the comparison is in fact between nonlinear and linear transceiver designs. Fig. 2 shows the bit error rates (BER) of the optimal transceivers with sum MSE (a M-Schur-convex) objective function, and weighted geometric mean MSE (a M-Schur-concave) objective function. Both two-hop and three-hop systems are simulated with $\rho_t = 0$, $\rho_r = 0.2$, $\sigma_e^2 = 0.001$, $P_2/\sigma_{n_2}^2 = P_3/\sigma_{n_3}^2 = 30$dB and $P_1/\sigma_{n_1}^2$ being varied from 5 to 30dB. As expected, the designs with M-Schur-convex objective function (i.e., nonlinear transceiver) perform much better than that with M-Schur-concave objective function (i.e., linear transceiver). Furthermore, although the three-hop system performs not as good as the two-hop system, due to the extra hop of channel and noise amplification, the performance of the two-hop and three-hop systems shows the same trend. In the following, we focus on the M-Schur-convex objective function (i.e., nonlinear transceiver) for two-hop system only.

Next, we investigate the effect of the channel estimation error on the BER performance. Fig. 3 shows the BERs of the proposed robust nonlinear design and the corresponding algorithm based on estimated CSI only (which takes the channel estimates as true channels) with $\rho_t = 0.5$, $\rho_t = 0$, $P_1/\sigma_{n_1}^2 = 30$dB, and $P_2/\sigma_{n_2}^2$ being varied from 10 to 35dB. It can be seen that smaller estimation errors lead to better performance for both algorithms, but the performance of the proposed algorithm is always better than that based on the estimated CSI only. Of course, the performance of the two algorithms coincide when $\sigma_e^2 = 0$.

Finally, we illustrate the effects of correlation in the channel estimation errors. Fig. 4 shows the BERs of the proposed robust design with M-Schur-convex objective functions and the corresponding algorithm based estimated CSI only for different ρ_r, when $\rho_t = 0$, $\sigma_e^2 = 0.002$, $P_1/\sigma_{n_1}^2 = 30$dB, and $P_2/\sigma_{n_2}^2$ being varied from 10 to 35dB. It can be seen that in addition to the fact that the performance of the proposed robust design is always better than that based on the estimated CSI only, as ρ_r increases, the performance gain of the proposed robust design with respect to that based on CSI only becomes lager. It is most obvious when $\rho_r = 0.9$ and at high SNR at the second hop. Fig. 5 shows the corresponding BERs for different ρ_t, with $\rho_r = 0$, $\sigma_e^2 = 0.002$, $P_2/\sigma_{n_2}^2 = 30$dB, and $P_1/\sigma_{n_1}^2$ being varied from 10 to 35dB. It can be seen that a similar conclusion can be drawn.

VII. CONCLUSIONS

Joint Bayesian robust transceiver design for multi-hop AF MIMO relaying systems was investigated. It was assumed that channel estimation errors exist in CSI in all hops. At the source node, a nonlinear Tomlinson-Harashima precoding was used, and was jointly optimized with linear forwarding matrices at all relays and linear equalizer at the destination. A general transceiver optimization problem was formulated with objective function being either M-Scur-convex or M-Scur-concave. Using elegant properties of multiplicative majorization theory and matrix-monotone functions, the optimal structure of the transceivers was first derived. Then, the original optimization problem was greatly simplified and an iterative water-filling solution was proposed to solve for the remaining unknown variables. Simulation results showed that the proposed robust design has much better performance than the non-robust design.

APPENDIX A

PROOF OF LEMMA 1

Based on **Definition 2**, $\phi(\mathbf{z})$ is M-Schur-convex over $\mathcal{D} = \{\mathbf{z} : z_1 \geq \cdots \geq z_N \geq 0\}$ if and only if for $\mathbf{v}, \mathbf{u} \in \mathcal{D}$, $\mathbf{v} \prec_{\times} \mathbf{u}$ implies $\phi(\mathbf{v}) \leq \phi(\mathbf{u})$.

For a vector $\mathbf{z} \in \mathcal{D}$, define

$$\tilde{\mathbf{z}} = [\tilde{z}_1, \cdots, \tilde{z}_N]^{\mathrm{T}} \quad \text{and} \quad \tilde{z}_k = \prod_{i=1}^{k} z_i. \tag{56}$$

For $\mathbf{v}, \mathbf{u} \in \mathcal{D}$, it is obvious that $\mathbf{v} \prec_{\times} \mathbf{u}$ is equivalent to

$$\{\tilde{v}_k \leq \tilde{u}_k\}_{k=1}^{N-1}, \quad \text{and} \quad \tilde{v}_N = \tilde{u}_N. \tag{57}$$

On the other hand, based on (56), z_k equals to

$$z_k = \tilde{z}_k / \tilde{z}_{k-1}, \quad k \leq L_z, \tag{58}$$

where $L_z - 1$ is the number of the nonzero elements of $\mathbf{z}$. Therefore $\phi(\mathbf{v}) \leq \phi(\mathbf{u})$ can be written as

$$\underbrace{\phi(\tilde{v}_1, \tilde{v}_2/\tilde{v}_1 \cdots, \tilde{v}_{L_v}/\tilde{v}_{L_v-1}, 0, \cdots,)}_{\triangleq \psi(\tilde{\mathbf{v}})} \leq \underbrace{\phi(\tilde{u}_1, \tilde{u}_2/\tilde{u}_1 \cdots, \tilde{u}_{L_u}/\tilde{u}_{L_u-1}, 0, \cdots,)}_{\triangleq \psi(\tilde{\mathbf{u}})}, \tag{59}$$

Based on (57) and (59), proving $\phi(\mathbf{z})$ is M-Schur-convex is equivalent to proving when $\{\tilde{v}_k \leq \tilde{u}_k\}_{k=1}^{N-1}$ and $\tilde{v}_N = \tilde{u}_N$ hold, we have $\psi(\tilde{\mathbf{v}}) \leq \psi(\tilde{\mathbf{u}})$. In other words, the proof becomes to prove $\psi(\bullet)$ is a vector-valued increasing function.

To prove $\psi(\bullet)$ is increasing, we only need to prove that when $\tilde{v}_k \leq \tilde{u}_k$ and $\tilde{v}_l = \tilde{u}_l$ for all $l \neq k$, we have $\psi(\tilde{\mathbf{v}}) \leq \psi(\tilde{\mathbf{u}})$ [19]. As $\tilde{v}_k \geq 0$ and $\tilde{u}_k \geq 0$, $\tilde{v}_k \leq \tilde{u}_k$ is equivalent to $\tilde{v}_k = \tilde{u}_k / e$ with $e \geq 1$. Substituting $\tilde{v}_k = \tilde{u}_k / e$ and $\tilde{v}_l = \tilde{u}_l$ for all $l \neq k$ into (59) and replacing $u_k = \tilde{u}_k / \tilde{u}_{k-1}$ for $k \leq L_u - 1$, proving $\psi(\tilde{\mathbf{v}}) \leq \psi(\tilde{\mathbf{u}})$ is equivalent to proving $\phi(u_1, \cdots, u_k/e, u_{k+1}e, \cdots)$ is increasing over $e \geq 1$ and $u_k/e \geq u_{k+1}e$.

APPENDIX B

ALGORITHM FOR COMPUTING $\mathbf{Q}_0$

Following the sufficient conditions given in [26], an explicit algorithm for constructing $\mathbf{Q}_0$ is given as follows. Without loss of generality, in this Appendix, for both singular value decomposition (SVD) and eigendecomposition, the elements of the diagonal singular value or eigenvalue matrix are assumed to be in decreasing order.

Step 1: Define $\mathbf{A}$ based on the following eigen-decomposition

$$(\mathbf{I}_N - \mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}}\cdots\mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K\cdots\mathbf{Q}_1\mathbf{M}_1)^{1/2}\sigma_b^2 = \underbrace{\mathbf{U}_{\mathbf{M}}\mathbf{\Lambda}_{\mathbf{M}}}_{\triangleq\mathbf{A}}\mathbf{U}_{\mathbf{M}}^{\mathrm{H}}. \tag{60}$$

Step 2: Initialize $\mathbf{S} = \mathbf{0}_{N\times N}$ and set

$$[\mathbf{S}]_{1,1} = \sqrt{\frac{|\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N} - [\mathbf{\Lambda}_{\mathbf{M}}]_{N,N}}{[\mathbf{\Lambda}_{\mathbf{M}}]_{1,1} - [\mathbf{\Lambda}_{\mathbf{M}}]_{N,N}}}, \qquad [\mathbf{S}]_{N,1} = \sqrt{\frac{[\mathbf{\Lambda}_{\mathbf{M}}]_{1,1} - |\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N}}{[\mathbf{\Lambda}_{\mathbf{M}}]_{1,1} - [\mathbf{\Lambda}_{\mathbf{M}}]_{N,N}}}. \tag{61}$$

Meanwhile, the orthogonal complement matrix of $[\mathbf{S}]_{:,1}$ is set to be

$$[\mathbf{S}]_{:,1}^{\perp} = \begin{bmatrix} -[\mathbf{S}]_{1,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{I} \\ [\mathbf{S}]_{N,1} & \mathbf{0} \end{bmatrix}. \tag{62}$$

Step 3: Begin recursion for $k = 1, \cdots, N-2$. Compute a $(N-k)\times(N-k)$ unitary matrix $\mathbf{V}^{(k)}$ based on the following eigendecomposition

$$(\mathbf{A}[\mathbf{S}]_{:,1:k}^{\perp})^{\mathrm{H}}[\mathbf{I} - \mathbf{A}[\mathbf{S}]_{:,1:k}([\mathbf{S}]_{:,1:k}^{\mathrm{H}}\mathbf{A}^{\mathrm{H}}\mathbf{A}[\mathbf{S}]_{:,1:k})^{-1}[\mathbf{S}]_{:,1:k}^{\mathrm{H}}\mathbf{A}^{\mathrm{H}}](\mathbf{A}[\mathbf{S}]_{:,1:k}^{\perp}) = \mathbf{V}^{(k)}\mathbf{\Lambda}^{(k)}(\mathbf{V}^{(k)})^{\mathrm{H}}. \tag{63}$$

Then update the $(k+1)^{\mathrm{th}}$ column of $\mathbf{S}$ as

$$[\mathbf{S}]_{:,k+1} = [\mathbf{S}]_{:,1:k}^{\perp}\mathbf{V}^{(k)}\mathbf{y}^{(k)} \tag{64}$$

and

$$\mathbf{y}^{(k)} = \left[\sqrt{\frac{|\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N} - [\mathbf{\Lambda}^{(k)}]_{N-k,N-k}}{[\mathbf{\Lambda}^{(k)}]_{1,1} - [\mathbf{\Lambda}^{(k)}]_{N-k,N-k}}}, \mathbf{0}_{1,N-k-1}, \sqrt{\frac{[\mathbf{\Lambda}^{(k)}]_{1,1} - |\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N}}{[\mathbf{\Lambda}^{(k)}]_{1,1} - [\mathbf{\Lambda}^{(k)}]_{N-k,N-k}}}\right]^{\mathrm{T}}. \tag{65}$$

Based on the SVD $\mathbf{S} = \mathbf{U}_{\mathbf{S}}\mathbf{\Lambda}_{\mathbf{S}}\mathbf{V}_{\mathbf{S}}^{\mathrm{H}}$, the orthogonal complement matrix of $[\mathbf{S}]_{:,1:k+1}$ is computed as

$$[\mathbf{S}]_{:,1:k+1}^{\perp} = [\mathbf{U}_{\mathbf{S}}]_{:,k+2:N}. \tag{66}$$

Step 4: When $k = N-1$, $[\mathbf{S}]_{:,N} = [\mathbf{S}]^{\perp}_{:,1:N-2}\mathbf{V}^{(N-2)}\mathbf{y}^{(N-1)}$ and

$$\mathbf{y}^{(N-1)} = \left[\sqrt{\frac{[\mathbf{\Lambda}^{(N-2)}]_{1,1} - |\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N}}{[\mathbf{\Lambda}^{(N-2)}]_{1,1} - [\mathbf{\Lambda}^{(N-2)}]_{2,2}}}, -\sqrt{\frac{|\mathbf{A}^{\mathrm{H}}\mathbf{A}|^{1/N} - [\mathbf{\Lambda}^{(N-2)}]_{2,2}}{[\mathbf{\Lambda}^{(N-2)}]_{1,1} - [\mathbf{\Lambda}^{(N-2)}]_{2,2}}}\right]^{\mathrm{T}}. \tag{67}$$

Step 5: Finally, $\mathbf{Q}_0$ equals to $\mathbf{Q}_0 = \mathbf{U}_{\mathbf{M}}\mathbf{S}$.

APPENDIX C

PROOF OF LEMMA 2

Proof of "if" direction

First, we will prove that for any two vectors $\mathbf{v}, \mathbf{u} \in \mathcal{D}$, $\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$ implies $\phi(\bullet)$ is a decreasing M-Schur-concave function over $\mathcal{D}$.

When $\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$ holds, $\mathbf{v} \prec_{\times} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$ must hold. Using **Lemma 1**, $\phi(\bullet)$ must be M-Schur-concave over $\mathcal{D}$.

Furthermore, for $\mathbf{v}, \mathbf{u} \in \mathcal{D}$ with $v_k \leq u_k$ and $v_i = u_i$ for all $i \neq k$, we have $\mathbf{v} \prec_{\Pi} \mathbf{u}$. Then $\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$ implies $\phi(\bullet)$ is a decreasing function. Therefore, when $\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$, then we have $\phi(\bullet)$ is a decreasing M-Schur-convex function.

Proof of "only if" direction

On the other hand, when $\phi(\bullet)$ is a decreasing M-Schur-concave function, we need prove that $\mathbf{v} \prec_{\Pi} \mathbf{u} \Rightarrow \phi(\mathbf{v}) \geq \phi(\mathbf{u})$. For any two vectors $\mathbf{v}, \mathbf{u} \in \mathcal{D}$ with $\mathbf{v} \prec_{\Pi} \mathbf{u}$ we can construct a vector $\boldsymbol{\tau} \in \mathcal{D}$ with $\tau_i = u_i$ for $i < N$ and τ_N is chosen to makes $\prod_{i=1}^{N} \tau_i = \prod_{i=1}^{N} v_i$. It is obvious that $\tau_N \leq u_N$. Then if $\mathbf{v} \prec_{\Pi} \mathbf{u}$, we have $\mathbf{v} \prec_{\times} \boldsymbol{\tau}$ and $\boldsymbol{\tau} \prec_{\Pi} \mathbf{u}$.

As $\phi(\bullet)$ is M-Schur-concave, based on **Lemma 1** we directly have $\phi(\mathbf{v}) \geq \phi(\boldsymbol{\tau})$. Furthermore, since the difference between $\boldsymbol{\tau}$ and $\mathbf{u}$ is only in the last element with $\tau_N \leq u_N$, as $\phi(\bullet)$ is decreasing, we have $\phi(\boldsymbol{\tau}) \geq \phi(\mathbf{u})$. Combining the two inequalities, we have $\phi(\mathbf{v}) \leq \phi(\mathbf{u})$.

APPENDIX D

PROOF OF LEMMA 3

Based on **Lemma 1**, it can be proved that $\prod_{i=1}^{k}(1-z_i)$ is an M-Schur-concave function. It is also obvious that $\prod_{i=1}^{k}(1-z_i)$ is a decreasing function for $\mathbf{z} \in \mathcal{C} = \{\mathbf{z} : 1 > z_1 \geq \cdots \geq z_N \geq 0\}$. Using **Lemma 2**, for $\mathbf{v}, \mathbf{u} \in \mathcal{C}$ with $\mathbf{v} \prec_{\Pi} \mathbf{u}$, we have

$$\prod_{i=1}^{k} \underbrace{(1-v_i)}_{\triangleq \hat{v}_{(i)}} \geq \prod_{i=1}^{k} \underbrace{(1-u_i)}_{\triangleq \hat{u}_{(i)}} > 0, \quad k = 1, \cdots, N. \tag{68}$$

We construct a vector $\hat{\boldsymbol{\tau}} = [\hat{\tau}_{(1)}, \cdots, \hat{\tau}_{(N)}]^{\mathrm{T}}$ with $\hat{\tau}_{(i)} = \hat{u}_{(i)}$ for $i < N$ and $\hat{\tau}_{(N)}$ is chosen to makes $\prod_{i=1}^{N} \hat{v}_{(i)} = \prod_{i=1}^{N} \hat{\tau}_{(i)}$ hold. It is obvious that $\tau_{(N)} \geq u_{(N)}$. As the only difference between $\tau_{(i)}$ and $u_{(i)}$ is at $i = N$, when $\phi(\bullet)$ is increasing, we have $\phi(\hat{\boldsymbol{\tau}}) \geq \phi(\hat{\mathbf{u}})$ where $\hat{\mathbf{u}} = [\hat{u}_{(1)}, \cdots, \hat{u}_{(N)}]^{\mathrm{T}}$.

On the other hand, based on (68) and the fact that $\hat{\tau}_{(i)} = \hat{u}_{(i)}$ for $i < N$, it can be concluded that (a) $\prod_{i=1}^{k} \hat{v}_{(i)} \geq \prod_{i=1}^{k} \hat{\tau}_{(i)}$ for $1 \leq k < N$. Based on the definition of $\hat{\tau}_N$, it can also be concluded that (b) $\prod_{i=1}^{N} \hat{v}_{(i)} = \prod_{i=1}^{N} \hat{\tau}_{(i)} > 0$. Results (a) and (b) implies $\hat{\mathbf{v}} \prec_{\times} \hat{\boldsymbol{\tau}}$ where $\hat{\mathbf{v}} = [\hat{v}_{(1)}, \cdots, \hat{v}_{(N)}]^{\mathrm{T}}$ [19]. As $\phi(\bullet)$ M-Schur-concave, using **Lemma 1**, we have $\phi(\hat{\mathbf{v}}) \geq \phi(\hat{\boldsymbol{\tau}})$. Together with the conclusion in the last paragraph, we can obtain $\phi(\hat{\mathbf{v}}) \geq \phi(\hat{\mathbf{u}})$. Finally, with $\hat{\mathbf{v}} = \mathbf{1}_N - \mathbf{v}$ and $\hat{\mathbf{u}} = \mathbf{1}_N - \mathbf{u}$, the proof is completed.

APPENDIX E
PROOF OF PROPERTY 1

First notice two facts in matrix theory: (a) for two matrices $\boldsymbol{A}$ and $\boldsymbol{B}$ with compatible dimension $\lambda_i(\boldsymbol{AB}) = \lambda_i(\boldsymbol{BA})$; (b) for two positive semi-definite matrices $\boldsymbol{A}$ and $\boldsymbol{B}$, $\prod_{i=1}^{n} \lambda_i(\boldsymbol{AB}) \leq \prod_{i=1}^{n} \lambda_i(\boldsymbol{A})\lambda_i(\boldsymbol{B})$, where the equality holds when $\boldsymbol{A}$ and $\boldsymbol{B}$ has the same unitary matrix in eigendecomposition [19]. With these two facts, we have

$$\begin{aligned}
&\prod_{i=1}^{n} \lambda_i(\mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}} \cdots \mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K \cdots \mathbf{Q}_1\mathbf{M}_1) \\
=&\prod_{i=1}^{n} \lambda_i(\mathbf{M}_2^{\mathrm{H}}\mathbf{Q}_2^{\mathrm{H}} \cdots \mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K \cdots \mathbf{Q}_2\mathbf{M}_2\mathbf{Q}_1\mathbf{M}_1\mathbf{M}_1^{\mathrm{H}}\mathbf{Q}_1^{\mathrm{H}}) \\
\leq&\prod_{i=1}^{n} \lambda_i(\mathbf{M}_2^{\mathrm{H}}\mathbf{Q}_2^{\mathrm{H}} \cdots \mathbf{M}_K^{\mathrm{H}}\mathbf{Q}_K^{\mathrm{H}}\mathbf{Q}_K\mathbf{M}_K \cdots \mathbf{Q}_2\mathbf{M}_2)\lambda_i(\mathbf{M}_1\mathbf{M}_1^{\mathrm{H}}) \qquad n = 1, \cdots, N, \qquad (69)
\end{aligned}$$

where the first equality is due to fact (a) and the second inequality is based on fact (b). Repeating the above two processes and based on the fact that $\lambda_i(\mathbf{M}_k\mathbf{M}_k^{\mathrm{H}}) = \lambda_i(\mathbf{M}_k^{\mathrm{H}}\mathbf{M}_k)$ we can obtain the following inequality

$$\prod_{i=1}^{n} \lambda_i(\boldsymbol{\Theta}) \leq \prod_{i=1}^{n} \underbrace{\lambda_i(\mathbf{M}_K^{\mathrm{H}}\mathbf{M}_K)\lambda_i(\mathbf{M}_{K-1}^{\mathrm{H}}\mathbf{M}_{K-1}) \cdots \lambda_i(\mathbf{M}_1^{\mathrm{H}}\mathbf{M}_1)}_{\triangleq \gamma_i(\{\mathbf{F}_k\}_{k=1}^{K})}, \qquad (70)$$

where the equality holds when $\mathbf{Q}_k$'s satisfy

$$\mathbf{Q}_k = \mathbf{V}_{\mathbf{M}_{k+1}}\mathbf{U}_{\mathbf{M}_k}^{\mathrm{H}}, \quad k = 1, \cdots, K \qquad (71)$$

where $\mathbf{U}_{\mathbf{M}_k}$ and $\mathbf{V}_{\mathbf{M}_k}$ are defined based on the following singular value decomposition $\mathbf{M}_k = \mathbf{U}_{\mathbf{M}_k}\mathbf{\Lambda}_{\mathbf{M}_k}\mathbf{V}_{\mathbf{M}_k}^{\mathrm{H}}$ with the diagonal elements of $\mathbf{\Lambda}_{\mathbf{M}_k}$ arranged in decreasing order. Furthermore, based on the definition of $\mathbf{M}_k$ in (23), $\gamma_i(\{\mathbf{F}_k\}_{k=1}^K)$ in (70) equals to

$$\gamma_i(\{\mathbf{F}_k\}_{k=1}^K) = \prod_{k=1}^K \frac{\lambda_i(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}{1+\lambda_i(\mathbf{F}_k^{\mathrm{H}}\bar{\mathbf{H}}_k^{\mathrm{H}}\mathbf{K}_{\mathbf{F}_k}^{-1}\bar{\mathbf{H}}_k\mathbf{F}_k)}. \tag{72}$$

APPENDIX F

OPTIMAL STRUCTURE OF $\mathbf{F}_k$

Defining new variables

$$\begin{aligned} \tilde{\mathbf{F}}_k &= 1/\sqrt{\eta_{f_k}}(\alpha_k P_k \mathbf{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{1/2}\mathbf{F}_k \\ \text{and} \quad \boldsymbol{\mathcal{H}}_k &= (\mathbf{K}_{\mathbf{F}_k}/\eta_{f_k})^{-1/2}\bar{\mathbf{H}}_k(\alpha_k P_k \mathbf{\Psi}_k + \sigma_{n_k}^2\mathbf{I})^{-1/2}, \end{aligned} \tag{73}$$

the optimization problem (47) is reformulated as

$$\begin{aligned} \min_{\tilde{\mathbf{F}}_k} \quad & g[\boldsymbol{\gamma}(\{\tilde{\mathbf{F}}_k\}_{k=1}^K)] \\ \text{s.t.} \quad & \gamma_n(\{\tilde{\mathbf{F}}_k\}_{k=1}^K) = \prod_{k=1}^K \frac{\lambda_n(\tilde{\mathbf{F}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k\tilde{\mathbf{F}}_k)}{1+\lambda_n(\tilde{\mathbf{F}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k\tilde{\mathbf{F}}_k)} \\ & \mathrm{Tr}(\tilde{\mathbf{F}}_k\tilde{\mathbf{F}}_k^{\mathrm{H}}) = P_k. \end{aligned} \tag{74}$$

When $\mathbf{\Psi}_k \propto \mathbf{I}$ or $\mathbf{\Sigma}_k \propto \mathbf{I}$, $\mathbf{K}_{\mathbf{F}_k}/\eta_{f_k}$ is constant [22] and thus $\boldsymbol{\mathcal{H}}_k$ is constant. Let $\tilde{\mathbf{F}}_{k,\mathrm{opt}}$ be the optimal solution of (74). With the following singular value decompositions,

$$\boldsymbol{\mathcal{H}}_k\tilde{\mathbf{F}}_{k,\mathrm{opt}} = \mathbf{U}_{\boldsymbol{A}_k}\mathbf{\Lambda}_{\boldsymbol{A}_k}\mathbf{V}_{\boldsymbol{A}_k}^{\mathrm{H}}, \qquad \boldsymbol{\mathcal{H}}_k = \mathbf{U}_{\boldsymbol{\mathcal{H}}_k}\mathbf{\Lambda}_{\boldsymbol{\mathcal{H}}_k}\mathbf{V}_{\boldsymbol{\mathcal{H}}_k}^{\mathrm{H}} \tag{75}$$

where the diagonal elements of $\mathbf{\Lambda}_{\boldsymbol{A}_k}$ and $\mathbf{\Lambda}_{\boldsymbol{\mathcal{H}}_k}$ are arranged in decreasing order, we can construct a matrix $\hat{\mathbf{F}}_k$ equals to

$$\hat{\mathbf{F}}_k = \mathbf{V}_{\boldsymbol{\mathcal{H}}_k}\mathbf{\Lambda}_{\mathbf{X}_k}\mathbf{V}_{\boldsymbol{A}_k}^{\mathrm{H}} \tag{76}$$

where $\mathbf{\Lambda}_{\mathbf{X}_k}$ is a rectangular diagonal matrix with the same rank as $\mathbf{\Lambda}_{\boldsymbol{A}_k}$ and $1/b_k\mathbf{\Lambda}_{\boldsymbol{\mathcal{H}}_k}\mathbf{\Lambda}_{\mathbf{X}_k} = \mathbf{\Lambda}_{\boldsymbol{A}_k}$. The scalar b_k is chosen to make that $\mathrm{Tr}(\hat{\mathbf{F}}_k\hat{\mathbf{F}}_k^{\mathrm{H}}) = P_k$ holds.

Using **Lemma 12** in [17], we can show that $\hat{\mathbf{F}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k\hat{\mathbf{F}}_k \succeq \tilde{\mathbf{F}}_{k,\mathrm{opt}}^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k^{\mathrm{H}}\boldsymbol{\mathcal{H}}_k\tilde{\mathbf{F}}_{k,\mathrm{opt}}$. Together with the formulation of $\gamma_n(\{\tilde{\mathbf{F}}_k\}_{k=1}^K)$ in (74), it can be concluded that $\gamma_n(\{\hat{\mathbf{F}}_k\}_{k=1}^K) \geq \gamma_n(\{\tilde{\mathbf{F}}_{k,\mathrm{opt}}\}_{k=1}^K)$. Since $g(\bullet)$ is an decreasing function, $g[\boldsymbol{\gamma}(\{\hat{\mathbf{F}}_k\}_{k=1}^K)] \leq g[\boldsymbol{\gamma}(\{\tilde{\mathbf{F}}_{k,\mathrm{opt}}\}_{k=1}^K)]$. Because $\tilde{\mathbf{F}}_{k,\mathrm{opt}}$ is the optimal solution, it is impossible to have $g[\boldsymbol{\gamma}(\{\hat{\mathbf{F}}_k\}_{k=1}^K)] < g[\boldsymbol{\gamma}(\{\tilde{\mathbf{F}}_{k,\mathrm{opt}}\}_{k=1}^K)]$. Therefore, $\hat{\mathbf{F}}_k$

must be the optimal solution. Furthermore, based on the relationship between of $\tilde{\mathbf{F}}_k$ and $\mathbf{F}_k$, it follows that

$$\mathbf{F}_{k,\mathrm{opt}} = \sqrt{\eta_{f_k}}(\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2 \mathbf{I})^{-1/2} \mathbf{V}_{\boldsymbol{\mathcal{H}}_k} \boldsymbol{\Lambda}_{\mathbf{X}_k} \mathbf{V}^{\mathrm{H}}_{\boldsymbol{A}_k}. \tag{77}$$

Notice that in general the unitary matrix $\mathbf{V}_{\boldsymbol{A}_k}$ depends on the optimal solution $\tilde{\mathbf{F}}_{k,\mathrm{opt}}$. However, from (74), it can be seen that the value of $\mathbf{V}_{\boldsymbol{A}_k}$ does not affect the objective functions and therefore it can be an arbitrary unitary matrix. Meanwhile, as the minimum dimension of $\tilde{\mathbf{F}}_k^{\mathrm{H}} \boldsymbol{\mathcal{H}}_k^{\mathrm{H}} \boldsymbol{\mathcal{H}}_k \tilde{\mathbf{F}}_k$ is N, only $N \times N$ principal submatrix of $\boldsymbol{\Lambda}_{\mathbf{X}_k}$ can be nonzero. For notational convenience, we denote that $[\boldsymbol{\Lambda}_{\mathbf{X}_k}]_{1:N,1:N} = \boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}$.

Substitute (77) into the definition of η_{f_k} in (46), we obtain a simple linear function of η_{f_x}, and η_{f_x} can be easily solved to be

$$\begin{aligned}\eta_{f_k} &= \sigma_{n_k}^2 / \{1 - \alpha_k \mathrm{Tr}[\mathbf{V}^{\mathrm{H}}_{\boldsymbol{\mathcal{H}}_k,N} (\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2 \mathbf{I})^{-1/2} \boldsymbol{\Psi}_k (\alpha_k P_k \boldsymbol{\Psi}_k + \sigma_{n_k}^2 \mathbf{I})^{-1/2} \mathbf{V}_{\boldsymbol{\mathcal{H}}_k,N} \boldsymbol{\Lambda}^2_{\boldsymbol{\mathcal{F}}_k}]\} \\ &\triangleq \xi_k(\boldsymbol{\Lambda}_{\boldsymbol{\mathcal{F}}_k}). \end{aligned} \tag{78}$$

REFERENCES

[1] O. Munoz-Medina, J. Vidal, and A. Agustin, "Linear transceiver design in nonregenerative relays with channel state information," *IEEE Trans. Signal Process.*, vol. 55, no. 6, pp. 2593–2604, June 2007.

[2] X. Tang and Y. Hua, "Optimal design of non-regenerative MIMO wireless relays," *IEEE Trans. Wireless Commun.*, vol. 6, no. 4, pp. 1398–1407, Apr. 2007.

[3] W. Guan and H. Luo, "Joint MMSE transceiver design in non-regenerative MIMO relay systems," *IEEE Commun. Lett.*, vol. 12, no. 7, pp. 517–519, July 2008.

[4] F.-S. Tseng, W.-R. Wu, and J.-Y. Wu "Joint source/relay precoder design in nonregenerative cooperative systems using an MMSE criterion," *IEEE Trans. Wireless Commun.*, vol. 8, no. 10, pp. 4928–4933, Oct. 2009.

[5] R. Mo and Y. Chew, "Precoder design for non-regenerative MIMO relay systems," *IEEE Trans. Wireless Commun.*, vol. 8, no. 10, pp. 5041–5049, Oct. 2009.

[6] Y. Rong, X. Tang, and Y. Hua, "A unified framework for optimizing linear nonregenerative multicarrier MIMO relay communication systems," *IEEE Trans. Signal Process.*, vol. 57, no. 12, pp. 4837–4851, Dec. 2009.

[7] Y. Rong and Y. Hua, "Optimality of diagonalization of multi-hop MIMO relays," *IEEE Trans. Wireless Commun.*, vol. 8, no. 12, pp. 6068–6077, Dec. 2009.

[8] C. Xing, S. Ma, and Y.-C. Wu, "Robust joint design of linear relay precoder and destination equalizer for dual-hop amplify-and-forward MIMO relay systems," *IEEE Trans. Signal Process.*, vol. 58, no. 4, pp. 2273–2283, Apr. 2010.

[9] C. Xing, S. Ma, Y.-C. Wu, and T.-S. Ng, "Transceiver design for dual-hop nonregenerative MIMO-OFDM relay systems under channel uncertainties," *IEEE Trans. Signal Process.*, vol. 58, no. 12, pp. 6325–6339, Dec. 2010.

[10] Y. Jiang, J. Li, and W. W. Hager, "Uniform channel decomposition for MIMO communications," *IEEE Trans. Signal Process.*, vol. 53, no. 11, pp. 4283–4294, Nov. 2005.

[11] A. A. D'Amico, "Tomlinson-Harashima precoding in MIMO systems: A unified approach to transceiver optimization based on multiplicative Schur-convexity," *IEEE Trans. Signal Process.*, vol. 56, no. 8, pp. 3662–3677, Aug. 2008.

[12] Y. Rong and M. R. A. Khandaken, "Uplink-downlink duality of multi-hop MIMO relay channel," *IEEE Trans. Wireless Commun.*, vol. 10, no. 6, pp. 1923–1931, June 2011.

[13] F. A. Dietrich, P. Breun and W. Utschick, "Robust Tomlinson-Harashima precoding for the wireless broadcast channel," *IEEE Trans. Signal Process.*, vol. 55, no. 2, pp. 631–644, Feb. 2007.

[14] R. F. H. Fischer, *Precoding and Signal Shaping for Digital Transmission*. New York: Wiley-IEEE, July 2002.

[15] X. Zhang, D. P. Palomar, and B. Ottersten, "Statistically robust design of linear MIMO transceivers," *IEEE Trans. Signal Process.*, vol. 56, no. 8, pp. 3678–3689, Aug. 2008.

[16] M. Ding and S. D. Blostein, "MIMO minimum total MSE transceiver design with imperfect CSI at both ends," *IEEE Trans. Signal Process.*, vol. 57, no. 3, pp. 1141–1150, Mar. 2009.

[17] D. P. Palomar, J. M. Cioffi, and M. A. Lagunas, "Joint Tx-Rx beamforming design for multicarrier MIMO channels: A unified framework for convex optimization," *IEEE Trans. Signal Process.*, vol. 51, no. 9, pp. 2381–2401, Sep. 2003.

[18] A. Beck, A. Ben-Tal and Y. C. Eldar, "Robust mean-squared error estimation of multiple signals in linear systems affected by model and noise uncertainties", *Math. Programming,* vol.107 155-187, Springer, 2006.

[19] A. W. Marshall and I. Olkin, *Inequalities: Theory of Majorization and Its Applications*. New York: Academic Press, 1979.

[20] H. Weyl, "Inequality between the two kinds of eigenvalues of a linear transformation," *Proc. Nat. Acad. Sci. USA*, vol. 35, no. 7, pp. 408–411, July 1949.

[21] C. Xing, S. Ma, Z. Fei, Y.-C. Wu, and J. Kuang, "Joint robust weighted LMMSE transceiver design for dual-hop AF multiple-antenna relay systems", accepted by *Proceedings of the IEEE Globecom 2011*, Dec. 2011, Houston, U.S.A.

[22] C. Xing, Z. Fei, Y.-C. Wu, S. Ma, and J. Kuang, "Robust transceiver design for AF MIMO relay systems with column correlations", accepted by *Proceedings of the IEEE ICSPCC 2011*, Sep. 2011, Xi'an, China.

[23] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge University Press, 2004.

[24] W. Yu, W. Rhee, S. Boyd, and J. Cioffi, "Iterative water-filling for Gaussian vector multiple access channels," *IEEE Trans. Infor. Theory*, vol. 50, no. 1, pp.145–151, Jan. 2004.

[25] L. Musavian, M. R. Nakhi, M. Dohler, and A. H. Aghvami, "Effect of channel uncertianty on the mutual information of MIMO fading channels," *IEEE Trans. Veh. Technol.*, vol. 56, no. 5, pp. 2798–2806, Sep. 2007.

[26] J.-K. Zhang, A. Kavcic, and K. M. Wong, "Equal-diagonal QR decompsotion and its application to preoder design for successive-cancellation detection," *IEEE Trans. Infor. Theory*, vol. 51, no. 1, pp. 154–172, Jan. 2005.

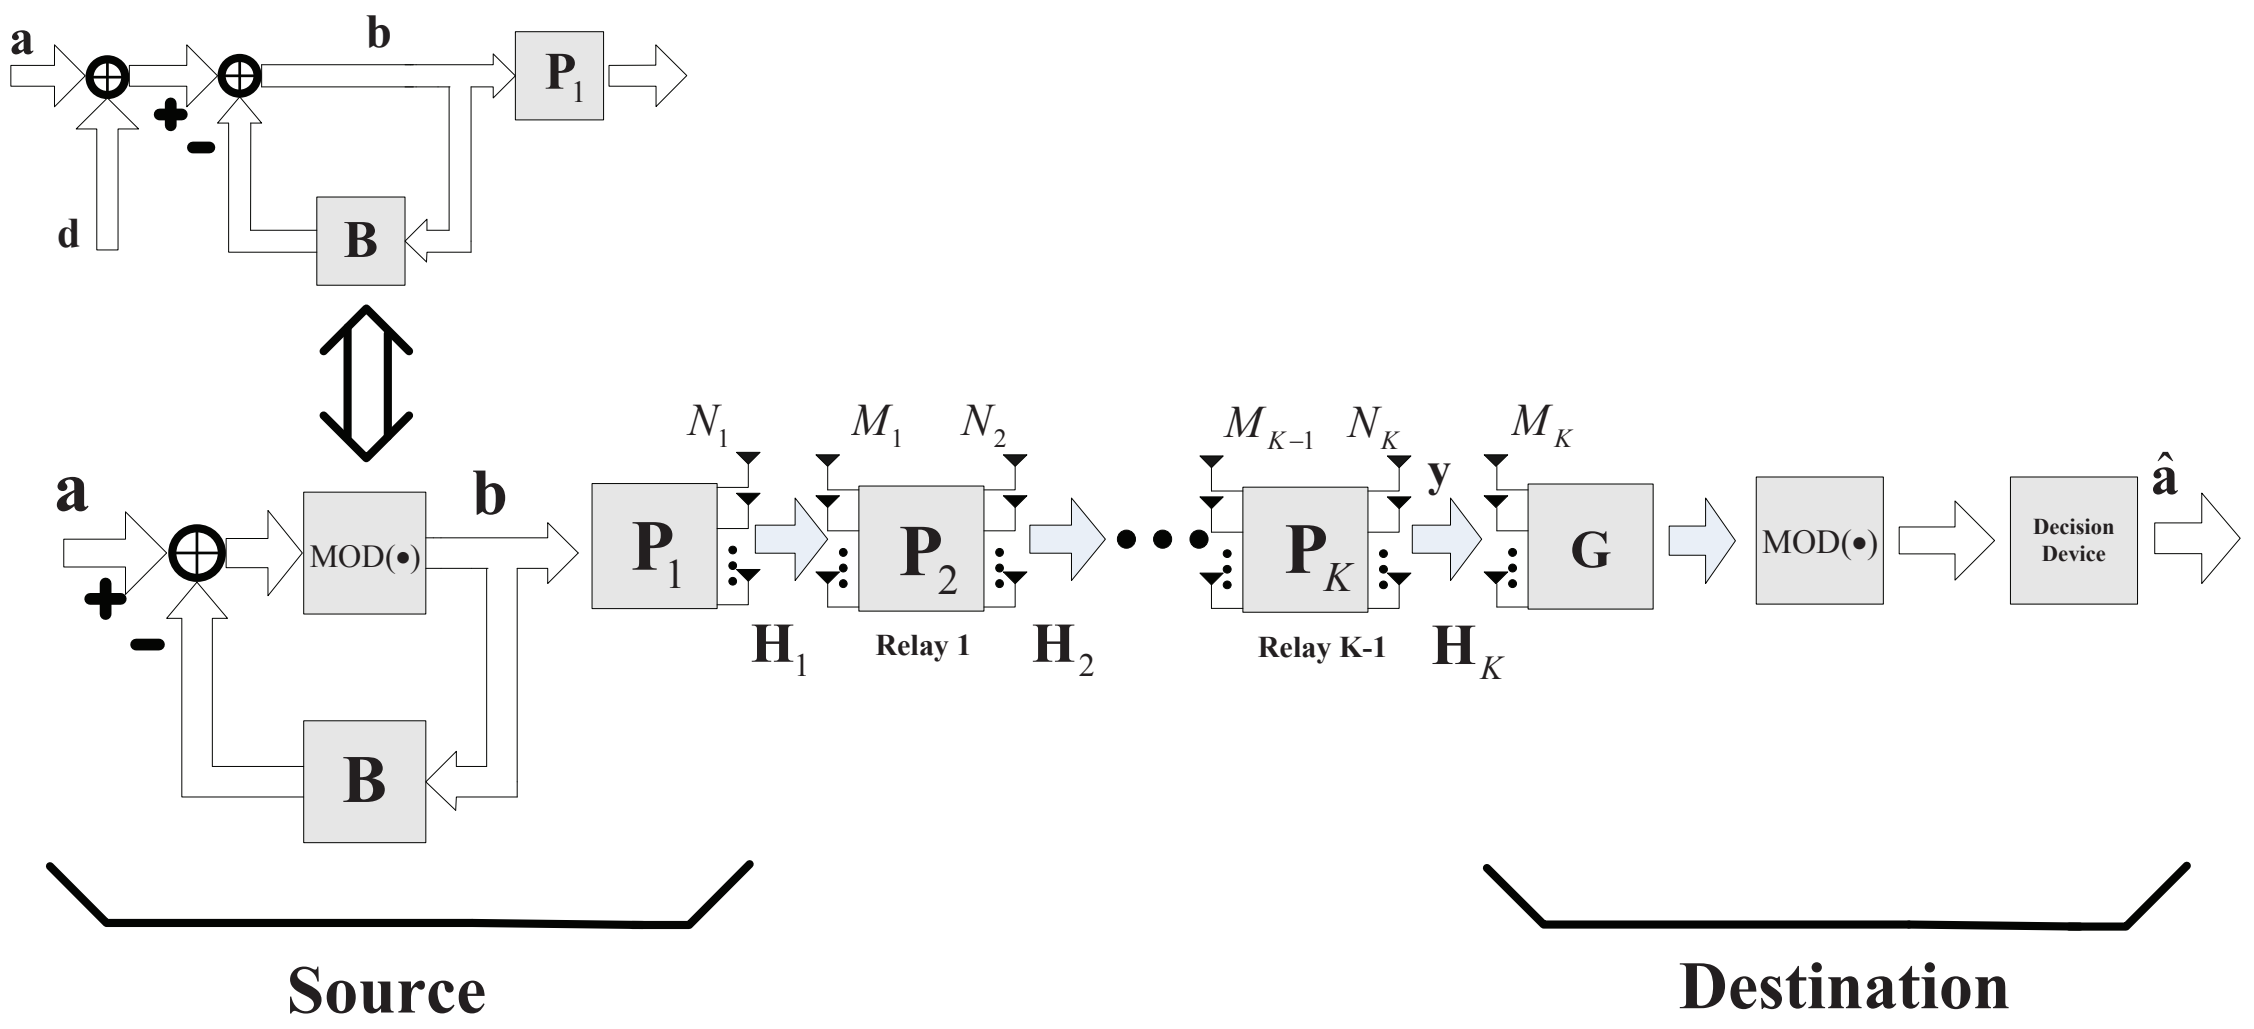

Fig. 1. Multi-hop AF MIMO relaying system with Tomlinson-Harashima Precoding at the source.

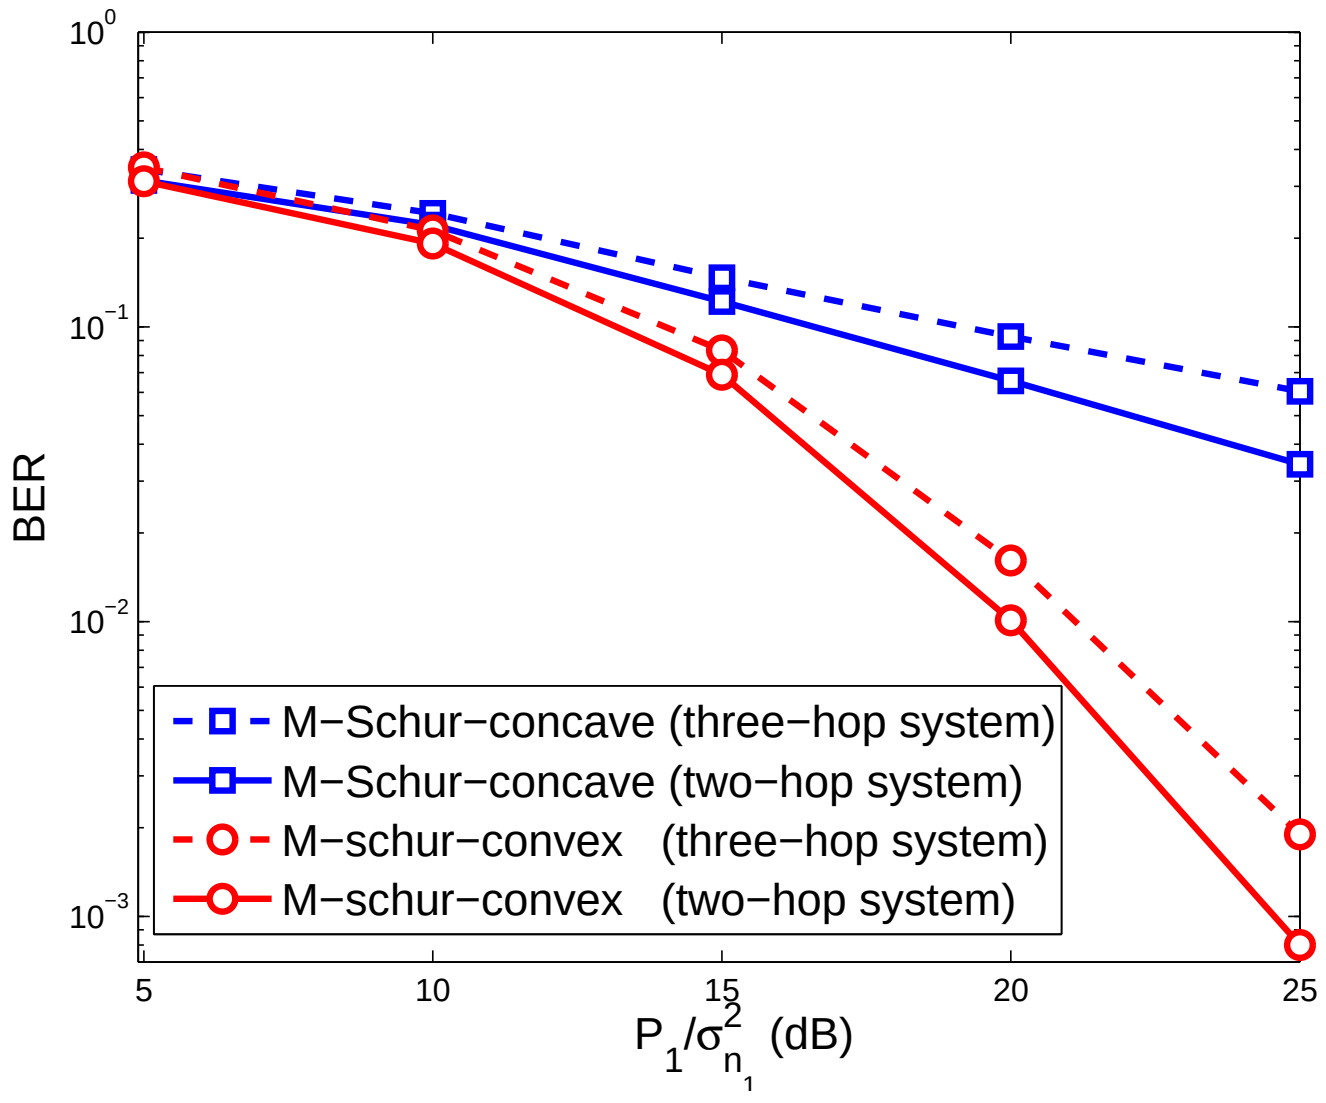

Fig. 2. BERs of the proposed transceivers with M-schur-convex and M-Schur-concave objective functions when $\rho_t = 0$, $\rho_r = 0.2$, $\sigma_e^2 = 0.001$.

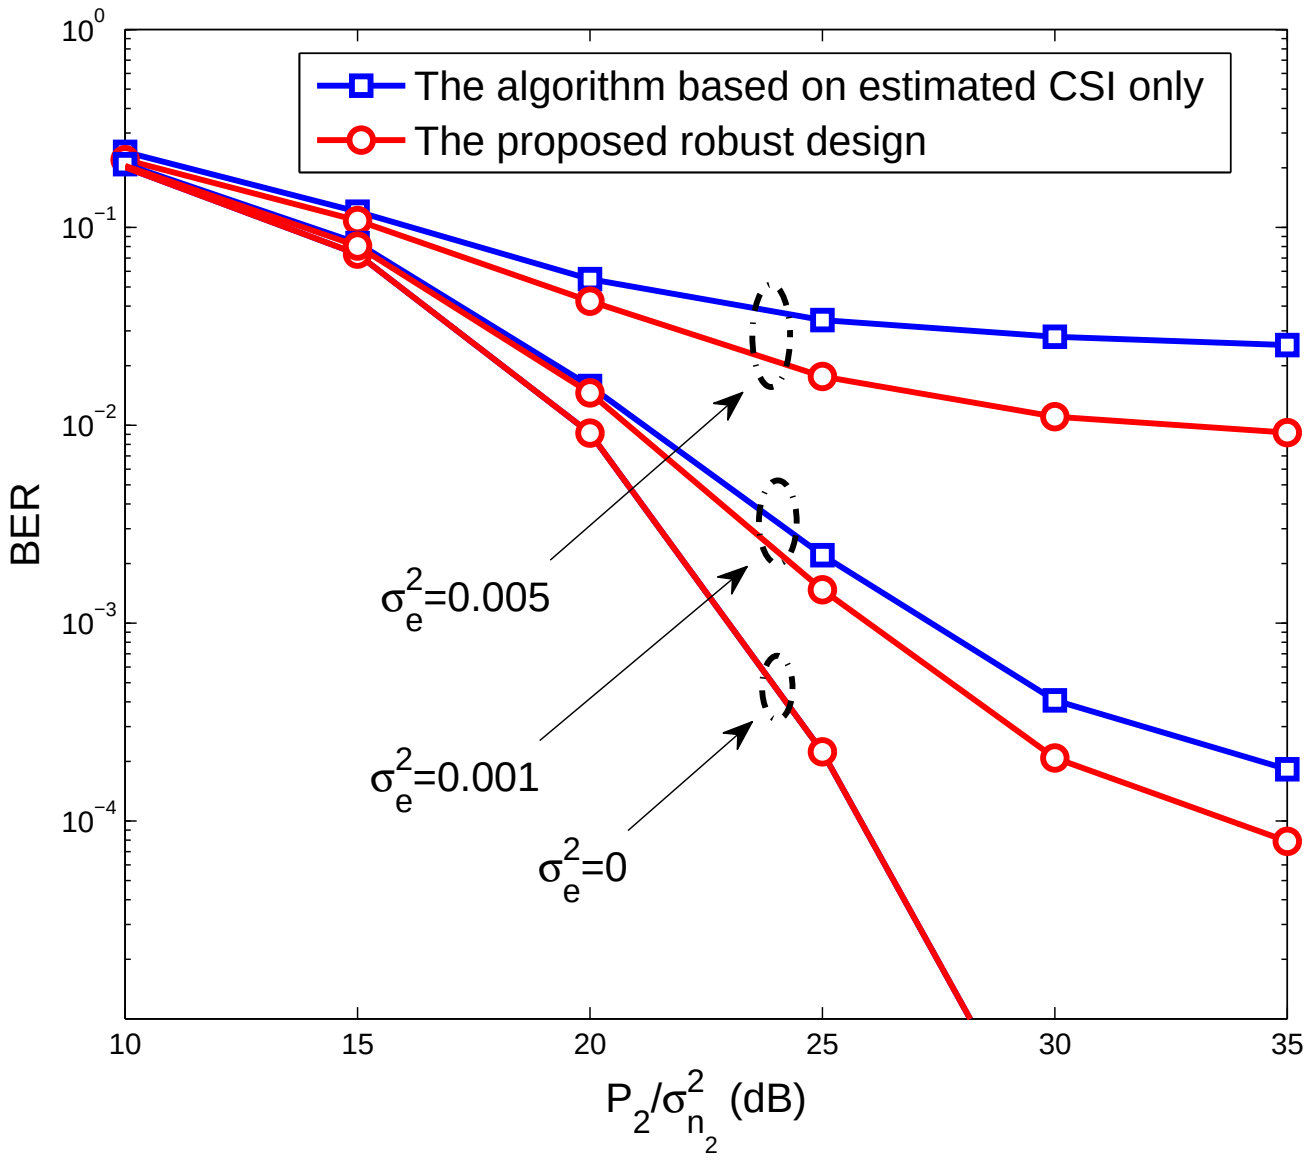

Fig. 3. BERs of proposed robust design with M-schur-convex objective functions and the algorithm based on estimated CSI only when $\rho_t = 0.5$, $\rho_r = 0$, and $P_1/\sigma_{n_1}^2 = 30$dB.

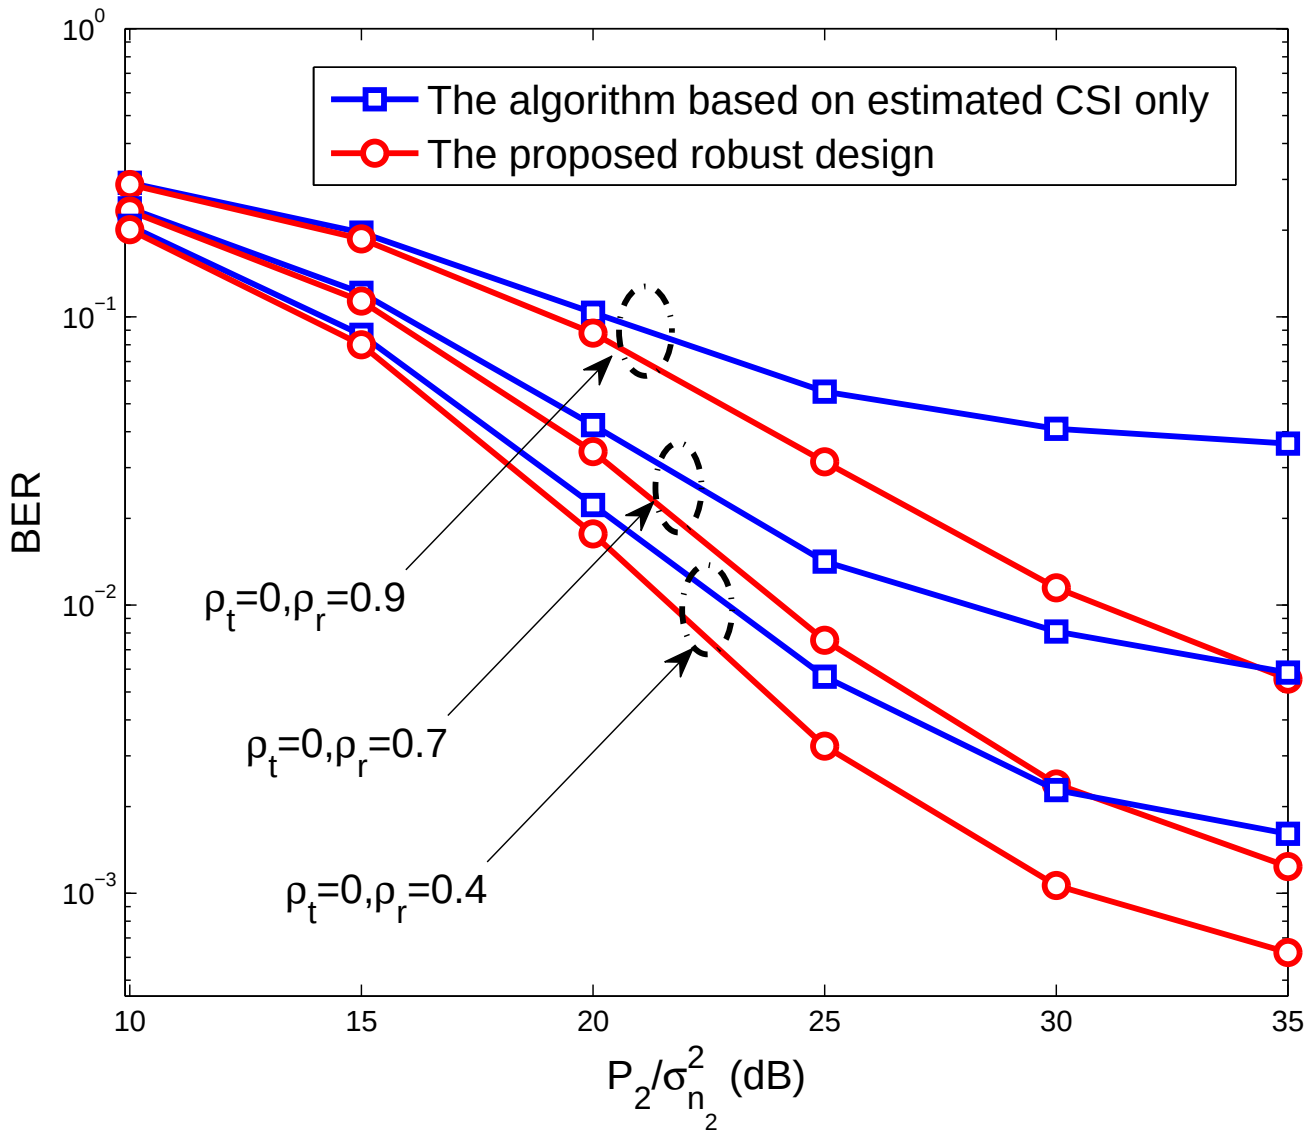

Fig. 4. BERs of proposed robust design with M-schur-convex objective functions and the algorithm based on estimated CSI only with different ρ_r, when $\rho_t = 0$, $\sigma_e^2 = 0.002$ and $P_1/\sigma_{n_1}^2 = 30$dB.

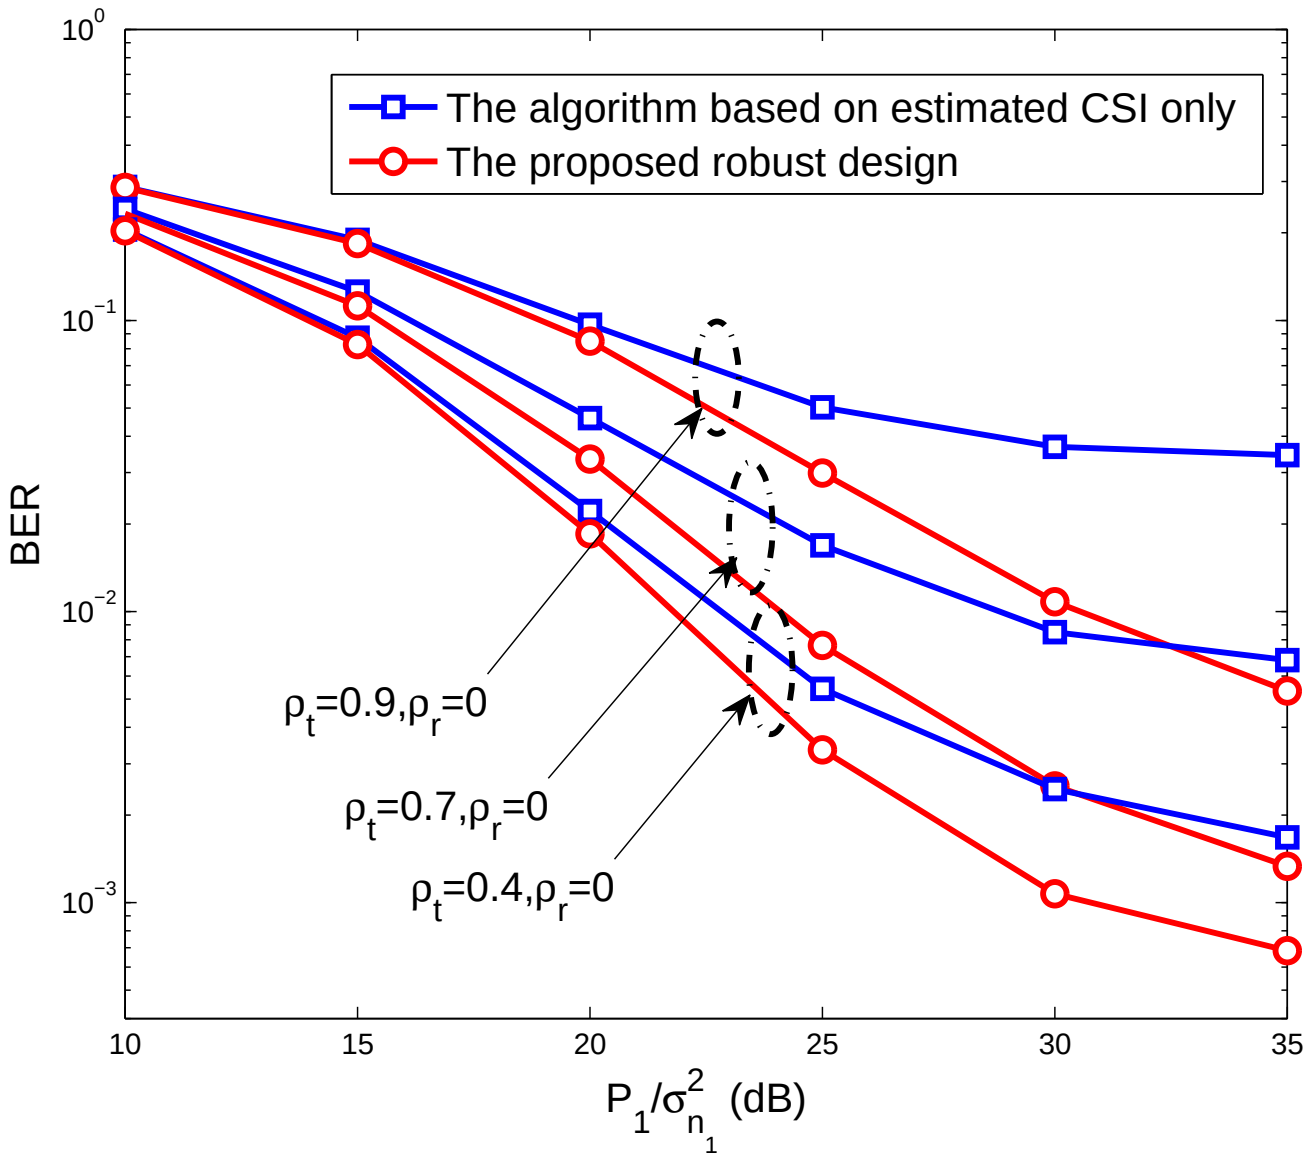

Fig. 5. BERs of proposed robust design with M-schur-convex objective functions and the algorithm based on estimated CSI only with different ρ_t, when $\rho_r = 0$, $\sigma_e^2 = 0.002$ and $P_2/\sigma^2_{n_2} = 30$dB.